(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/054850 A1

(51) International Patent Classification[7]: B60R 21/01

(21) International Application Number: PCT/IT2003/000827

(22) International Filing Date: 17 December 2003 (17.12.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
TO2002 A 01091 17 December 2002 (17.12.2002) IT

(71) Applicant (*for all designated States except US*): **TRW OCCUPANT SAFETY SYSTEMS S.p.A.** [IT/IT]; Corso Stati Uniti, 41, I-10129 Torino (IT).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **OLIVERO, Patrizia** [IT/IT]; Via XXV Aprile, 1, I-10028 Trofarello (IT). **ÜNLÜ, Timur** [DE/DE]; Hermann-Sernatinger Str. 9, 78315 Radolfzell (DE). **ROSENGARTEN, Marco** [DE/DE]; Wiesenstr. 6, 78343 Gaienhofen (DE).

(74) Agents: **JORIO, Paolo** et al.; C/O Studio Torta S.R.L., Via Viotti, 9, 10121 Torino (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: METHOD OF CONTROLLING A VEHICLE BONNET ACTUATING ASSEMBLY FOR SAFEGUARDING PEDESTRIANS IN THE EVENT OF IMPACT AGAINST THE FRONT BUMPER OF THE VEHICLE

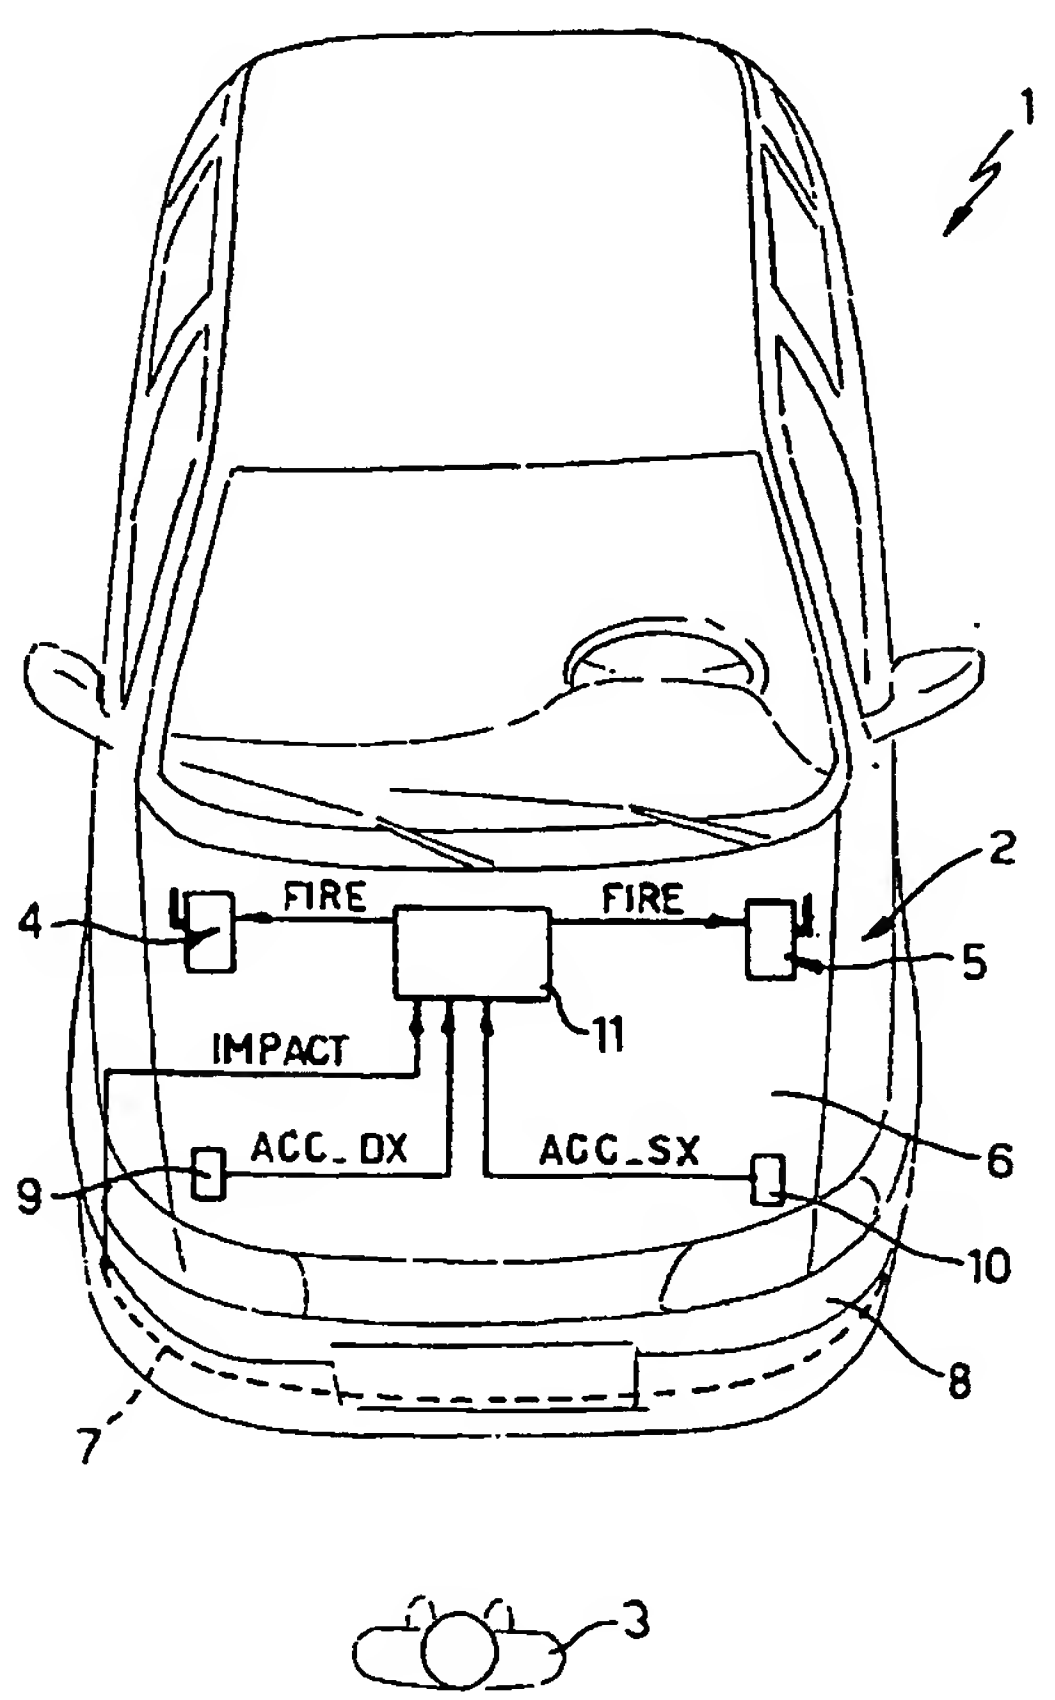

(57) Abstract: There is described a method of controlling a bonnet actuating assembly (2) of a vehicle (1) to safeguard pedestrians (3) in the event of impact against the front bumper (8) of the vehicle (1), the method including the steps of: acquiring an impact signal (IMPACT) containing information relating to the presence and/or duration of impact against the front bumper (8); acquiring at least one acceleration signal (ACC_DX, ACC_SX) indicating the intensity of impact-induced deceleration of the front bumper (8); comparing the impact signal (IMPACT) with a respective minimum impact value (V_ MIN); comparing the acceleration signal (ACC_DX, ACC_SX) with a respective minimum acceleration value (AMA_DX_MIN, AMAS_SX_MIN); and activating the bonnet actuating assembly (2) when the impact signal (IMPACT) is above the respective minimum impact value (V_MIN) at least for a predetermined minimum time (CLOSE_TIME_MIN), and the acceleration signal (ACCD_DX, ACCS_SX) is above the respective minimum acceleration value (AMA_DX_MIN, AMA_SX_MIN) at least for a predetermined minimum time (EVENT_MIN_AMA).

WO 2004/054850 A1

(84) **Designated States** *(regional)*: ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

(48) **Date of publication of this corrected version:**
16 September 2004

(15) **Information about Correction:**
see PCT Gazette No. 38/2004 of 16 September 2004, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/054850 A1

(51) International Patent Classification⁷: B60R 21/01

(21) International Application Number: PCT/IT2003/000827

(22) International Filing Date: 17 December 2003 (17.12.2003)

(25) Filing Language: Italian

(26) Publication Language: English

(30) Priority Data:
TO2002 A 01091 17 December 2002 (17.12.2002) IT

(71) Applicant *(for all designated States except US)*: **TRW OCCUPANT SAFETY SYSTEMS S.p.A.** [IT/IT]; Corso Stati Uniti, 41, I-10129 Torino (IT).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **OLIVERO, Patrizia** [IT/IT]; Via XXV Aprile, 1, I-10028 Trofarello (IT). **ÜNLÜ, Timur** [DE/DE]; Hermann-Sernatinger Str. 9, 78315 Radolfzell (DE). **ROSENGARTEN, Marco** [DE/DE]; Wiesenstr. 6, 78343 Gaienhofen (DE).

(74) Agents: **JORIO, Paolo** et al.; C/O Studio Torta S.R.L., Via Viotti, 9, 10121 Torino (IT).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF CONTROLLING A VEHICLE BONNET ACTUATING ASSEMBLY FOR SAFEGUARDING PEDESTRIANS IN THE EVENT OF IMPACT AGAINST THE FRONT BUMPER OF THE VEHICLE

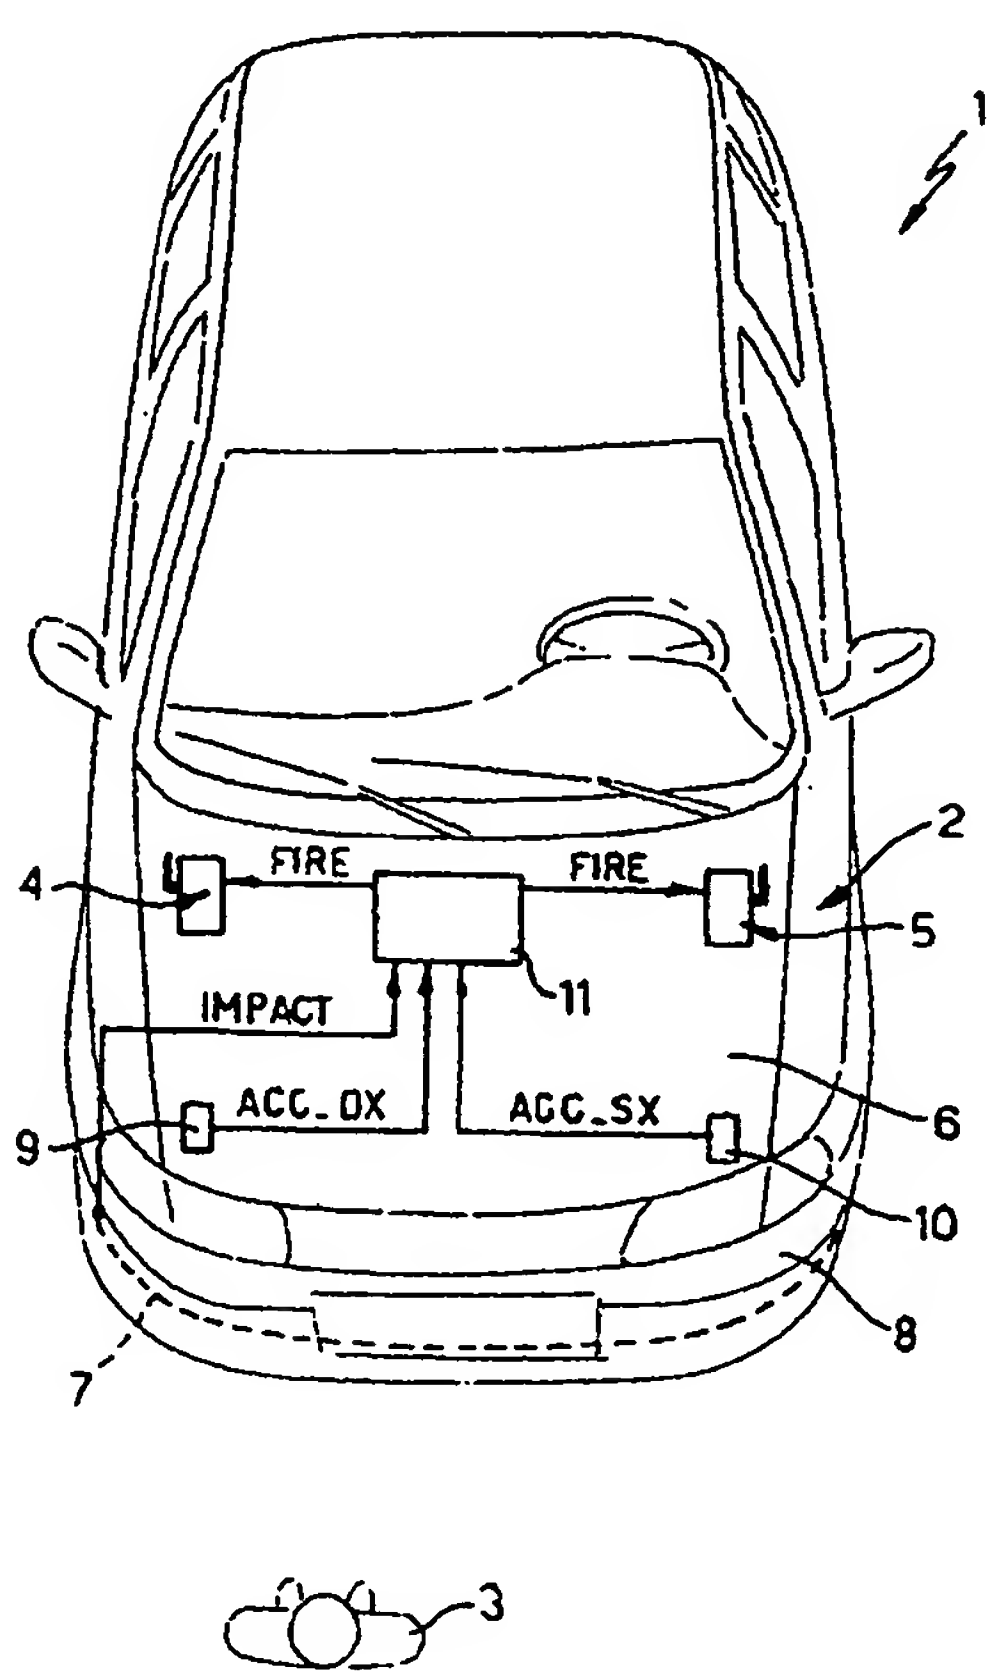

(57) Abstract: There is described a method of controlling a bonnet actuating assembly (2) of a vehicle (1) to safeguard pedestrians (3) in the event of impact against the front bumper (8) of the vehicle (1), the method including the steps of: acquiring an impact signal (IMPACT) containing information relating to the presence and/or duration of impact against the front bumper (8); acquiring at least one acceleration signal (ACC_DX, ACC_SX) indicating the intensity of impact-induced deceleration of the front bumper (8); comparing the impact signal (IMPACT) with a respective minimum impact value (V MIN); comparing the acceleration signal (ACC_DX, ACC_SX) with a respective minimum acceleration value (AMA_DX_MIN, AMAS_XM_IN); and activating the bonnet actuating assembly (2) when the impact signal (IMPACT) is above the respective minimum impact value (VM_IN) at least for a predetermined minimum time (CLOSE_TIME_MIN), and the acceleration signal (ACCD_X, ACCS_X) is above the respective minimum acceleration value (AMA_DX_MIN, AMA_SX_MIN) at least for a predetermined minimum time (EVENT_MIN_AMA).

WO 2004/054850 A1

Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD OF CONTROLLING A VEHICLE BONNET ACTUATING ASSEMBLY FOR SAFEGUARDING PEDESTRIANS IN THE EVENT OF IMPACT AGAINST THE FRONT BUMPER OF THE VEHICLE

TECHNICAL FIELD

The present invention relates to a method of controlling a vehicle bonnet actuating assembly for safeguarding pedestrians in the event of impact against the front bumper of the vehicle.

BACKGROUND ART

As is known, in a head-on collision with a vehicle, a pedestrian is first struck by the front bumper, which is normally followed by impact against the bonnet of the vehicle.

To prevent serious injury to pedestrians caused by impact against the bonnet, the impact forces, and therefore deceleration of the pedestrian in the event of impact against the front of the vehicle, must be reduced as far as possible.

This can be done by providing a gap between the bonnet and the components housed inside the engine compartment closed by the bonnet, so as to allow the

sheet metal of which the bonnet is made to deform substantially freely, and so deaden pedestrian impact. For example, in a vehicle travelling at 40 kilometres an hour, a gap of at least 80 millimetres should be allowed between the bonnet and the components housed inside the engine compartment.

To produce a gap beneath the bonnet, solutions have been proposed in which the vehicle is provided with a bonnet actuating assembly for moving the bonnet from an engine compartment closed position to a raised position in the event of impact.

Impact is detected using a sensor fitted to the front bumper of the vehicle, and which supplies an impact signal indicating impact against the bumper; the signal is supplied to the vehicle electronic central control unit, which, upon impact being detected, activates the bonnet actuating assembly.

The solutions proposed so far, however, all have one drawback preventing them from being used to full effect, and which lies in the bonnet actuating assembly also being activated by the vehicle electronic central control unit on detecting impact against the front bumper of the vehicle other than that for which the actuating assembly is designed, thus giving rise to spurious activation of the assembly.

DISCLOSURE OF INVENTION

It is an object of the present invention to provide a method of controlling a vehicle bonnet actuating

assembly, designed to at least partly eliminate the aforementioned drawbacks.

According to the present invention, there is provided a method of controlling a vehicle bonnet actuating assembly, as claimed in Claim 1.

BRIEF DESCRIPTION OF THE DRAWINGS

A preferred, non-limiting embodiment of the present invention will be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows, schematically, a vehicle equipped with a bonnet actuating assembly;

Figures 2, 3, 4 and 5 show flow charts of the control method according to the invention;

Figures 6 and 7 show graphs of quantities employed in the control method according to the invention.

BEST MODE FOR CARRYING OUT THE INVENTION

Number 1 in Figure 1 indicates as a whole a vehicle equipped with a bonnet actuating assembly 2 for safeguarding pedestrians 3 in the event of front impact against vehicle 1.

More specifically, bonnet actuating assembly 2, which is known and therefore not described in detail, may preferably, though not necessarily, be of the type substantially comprising a right lift device 4 and a left lift device 5, each of which has a relative integrated control device, and which are interposed between the frame and rear right and left portions of bonnet 6 of vehicle 1 to lift the rear portion of bonnet 6 from the

engine compartment closed position to a raised safety position.

Vehicle 1 also comprises an optical-fibre impact sensor 7 fitted to and extending the full length of the front bumper 8 of vehicle 1, and which supplies an impact signal IMPACT containing information relating to the presence and/or duration of impact; a right acceleration sensor 9 and left acceleration sensor 10 fitted respectively to the right and left ends of front bumper 8 of vehicle 1, and which respectively supply a right acceleration signal ACC_DX and left acceleration signal ACC_SX indicating deceleration induced by impact on the right and left ends of front bumper 8 respectively; and an electronic central control unit 11, which receives the impact signal IMPACT and right and left acceleration signals ACC_DX, ACC_SX from impact sensor 7 and right and left acceleration sensors 9, 10, and supplies an activating signal FIRE to activate bonnet actuating assembly 2 and so lift bonnet 6 upon detection of front impact of vehicle 1 against a pedestrian 3.

More specifically, electronic central control unit 11 processes impact signal IMPACT and right and left acceleration signals ACC_DX, ACC_SX as described below in detail with reference to the Figure 2 flow chart, to determine whether impact on front bumper 8 is caused by impact of vehicle 1 against a pedestrian 3 - in which case, bonnet actuating assembly 2 is to be activated - or by impact of another sort - in which case, bonnet

actuating assembly 2 need not be activated.

Moreover, electronic central control unit 11 only processes impact signal IMPACT and right and left acceleration signals ACC_DX, ACC_SX when vehicle speed is within a predetermined range depending, among other things, on the type of bonnet actuating assembly 2 vehicle 1 is equipped with.

Tests have shown, in fact, that there is no point in activating bonnet actuating assembly 2 at vehicle 1 speeds outside a minimum-maximum range. At below-minimum speed, impact is highly unlikely to cause pedestrian 3 to fall and strike bonnet 6, and low-speed-impact energy exchange between vehicle 1 and pedestrian 3 is so low anyway as to practically rule out any risk of brain damage caused by impact of pedestrian 3 against bonnet 6. At over-maximum speed, on the other hand, the trajectories travelled by pedestrian 3, upon impact, are such that the pedestrian's head is prevented from striking bonnet 6. Moreover, at high speed, the activating time of bonnet actuating assembly 2 becomes critical, in the sense that the head of pedestrian 3 may be caused to strike bonnet 6 as this is still being raised, thereby increasing energy exchange between pedestrian 3 and bonnet 6, and therefore the risk of brain damage.

More specifically, with reference to Figure 2, a number of minimum and maximum threshold values, stored beforehand in the memory of electronic central control

unit 11 when calibrating bonnet actuating assembly 2, are first acquired (block 80), and in particular:

- a minimum impact value V_MIN, with which a mean impact signal CMA is compared to determine whether or not impact has taken place on front bumper 8 of vehicle 1;

- a pair of minimum and maximum acceleration values AMA_DX_MIN and AMA_DX_MAX, with which a mean right acceleration signal AMA_DX is compared;

- a pair of minimum and maximum acceleration values AMA_SX_MIN and AMA_SX_MAX, with which a mean left acceleration signal AMA_SX is compared;

- a threshold TH_AMA, with which the mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX are compared;

- a pair of minimum and maximum speed values VEL_DX_MIN and VEL_DX_MAX, with which a right speed signal VEL_DX is compared;

- a pair of minimum and maximum speed values VEL_SX_MIN and VEL_SX_MAX, with which a left speed signal VEL_SX is compared;

- a minimum speed VEL_MIN and maximum speed VEL_MAX, e.g. of 20 and 50 km/h, with which the speed of vehicle 1 is compared;

- a threshold TH_VEL, with which right speed signal VEL_DX and left speed signal VEL_SX are compared;

- a pair of minimum and maximum time values CLOSE_TIME_MIN and CLOSE_TIME_MAX, with which the impact time on front bumper 8 of vehicle 1 is compared; and

- two minimum event values EVENT_MIN_AMA and EVENT_MIN_VEL, with which two event counters are compared.

More specifically, the minimum impact value V_MIN defines a threshold below which definitely no impact on front bumper 8 of vehicle 1 has taken place; the minimum acceleration values AMA_DX_MIN and AMA_SX_MIN and minimum speed values VEL_DX_MIN and VEL_SX_MIN define minimum impact energies below which there is no point in activating bonnet actuating assembly 2; and the maximum acceleration values AMA_DX_MAX and AMA_SX_MAX and maximum speed values VEL_DX_MAX and VEL_SX_MAX define maximum impact energies above which there is also no point in activating bonnet actuating assembly 2, by both cases involving impact against other than a pedestrian.

Thresholds TH_AMA and TH_VEL have a step pattern, as opposed to constant values, the first being a function of the amplitude of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX, as explained in detail later on, and the second being a function of the amplitude of right speed signal VEL_DX and left speed signal VEL_SX, as explained in detail later on.

Finally, minimum and maximum time values CLOSE_TIME_MIN, CLOSE_TIME_MAX, which may, for example, assume values of about 10-15 ms and 40 ms respectively, define minimum and maximum impact times below and above which, respectively, it is highly unlikely impact involves a pedestrian 3, so that bonnet actuating

assembly 2 need not be activated.

The speed VEL of vehicle 1 is then acquired (block 90) and compared with minimum speed VEL_MIN and maximum speed VEL_MAX (block 100). If the speed VEL of vehicle 1 is below minimum speed VEL_MIN or above maximum speed VEL_MAX (NO output of block 100), then bonnet actuating assembly 2 need not be activated, and block 100 goes back to block 90 until speed VEL falls within the range of minimum speed VEL_MIN and maximum speed VEL_MAX. Conversely, if speed VEL falls within the range of minimum speed VEL_MIN and maximum speed VEL_MAX (YES output of block 100), then the actual process of determining impact or not of a pedestrian 3 against front bumper 8 of vehicle 1 commences.

More specifically, impact signal IMPACT and right and left acceleration signals ACC_DX, ACC_SX are first acquired (block 110), and the mobile averages of impact signal IMPACT and right and left acceleration signals ACC_DX, ACC_SX are calculated to generate a mean impact signal CMA, a mean right acceleration signal AMA_DX, and a mean left acceleration signal AMA_SX respectively (block 120). The mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX are then time-integrated to generate a right speed signal VEL_DX and left speed signal VEL_SX respectively (block 130).

Four event counters AMA_DX_EVENT, AMA_SX_EVENT, VEL_DX_EVENT, VEL_SX_EVENT, used to store the occurrence of events associated with the right and left acceleration

sensors, as explained in detail later on, are then initialized, and mean right acceleration signal AMA_DX, mean left acceleration signal AMA_SX, right speed signal VEL_DX, and left speed signal VEL_SX are also reset (block 140).

Mean impact signal CMA is then compared with minimum impact value V_MIN (block 150). If mean impact signal CMA is below minimum impact value V_MIN (NO output of block 150), this means no object has contacted front bumper 8 of vehicle 1, and block 150 remains on standby. Conversely, if mean impact signal CMA is above minimum impact value V_MIN (YES output of block 150), this means an object has contacted front bumper 8 of vehicle 1, so measurement commences of impact time CLOSE_TIME, which is defined as the length of time mean impact signal CMA remains above minimum impact value V_MIN (block 160).

Three parallel routines are then performed to independently determine pedestrian impact or not against bumper 8 of vehicle 1, and wherein the first routine works on the basis of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX taken individually (block 170), the second routine works on the basis of right speed signal VEL_DX and left speed signal VEL_SX taken individually (block 180), and the third routine works on the basis of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX combined, as well as on the basis of right speed signal VEL_DX and left speed signal VEL_SX combined (block 185),

as explained in detail later on with reference to the flow charts in Figures 3, 4 and 5 respectively.

Once the three routines are completed, a check is made to determine whether at least one has determined pedestrian impact against bumper 8 of vehicle 1 (block 190). If none of the routines has determined pedestrian impact against bumper 8 of vehicle 1 (NO output of block 190), the operations described with reference to block 140 onwards are repeated. Conversely, if at least one of the routines has determined pedestrian impact against bumper 8 of vehicle 1 (YES output of block 190), the FIRE signal to activate the bonnet actuating assembly is generated (block 200), and the procedure is terminated.

Figure 3 shows a flow chart of the operations performed in the first routine to determine pedestrian impact against bumper 8 of vehicle 1 on the basis of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX taken individually.

As shown in Figure 3, mean left acceleration signal AMA_SX is first compared with minimum and maximum acceleration values AMA_SX_MIN and AMA_SX_MAX (block 210).

If mean left acceleration signal AMA_SX is outside the range defined by minimum and maximum acceleration values AMA_SX_MIN and AMA_SX_MAX (NO output of block 210), the event counter AMA_SX_EVENT is reset (block 220), and the operations described below with reference to block 250 are performed. Conversely, if mean left

acceleration signal AMA_SX is within the range defined by minimum and maximum acceleration values AMA_SX_MIN and AMA_SX_MAX (YES output of block 210), the event counter AMA_SX_EVENT is incremented one unit (block 230).

The event counter AMA_SX_EVENT is then compared with the minimum event value EVENT_MIN_AMA (block 240). If counter AMA_SX_EVENT is below minimum event value EVENT_MIN_AMA (NO output of block 240), the operations described below with reference to block 250 are performed. Conversely, if counter AMA_SX_EVENT is above minimum event value EVENT_MIN_AMA (YES output of block 240), the operations described below with reference to block 310 are performed.

In block 250 - which, as stated, is arrived at when event counter AMA_SX_EVENT is below minimum event value EVENT_MIN_AMA (NO output of block 240), and also when event counter AMA_SX_EVENT is reset (block 220) - the mean right acceleration signal AMA_DX is compared with minimum and maximum acceleration values AMA_DX_MIN and AMA_DX_MAX.

If mean right acceleration signal AMA_DX is outside the range defined by minimum and maximum acceleration values AMA_DX_MIN and AMA_DX_MAX (NO output of block 250), event counter AMA_DX_EVENT is reset (block 260), and the operations described below with reference to block 290 are performed. Conversely, if mean right acceleration signal AMA_DX is within the range defined by minimum and maximum acceleration values AMA_DX_MIN and

AMA_DX_MAX (YES output of block 250), event counter AMA_DX_EVENT is incremented one unit (block 270).

Event counter AMA_DX_EVENT is then compared with minimum event value EVENT_MIN_AMA (block 280). If event counter AMA_DX_EVENT is below minimum event value EVENT_MIN_AMA (NO output of block 280), the operations described below with reference to block 290 are performed. Conversely, if event counter AMA_DX_EVENT is above minimum event value EVENT_MIN_AMA (YES output of block 280), the operations described below with reference to block 310 are performed.

In block 290 - which, as stated, is arrived at when event counter AMA_DX_EVENT is below minimum event value EVENT_MIN_AMA (NO output of block 280), and also when event counter AMA_DX_EVENT is reset (block 260) - mean impact signal CMA is compared with minimum impact value V_MIN.

If mean impact signal CMA is below minimum impact value V_MIN (NO output of block 290), the operations described with reference to block 140 onwards are repeated. Conversely, if mean impact signal CMA is still above minimum impact value V_MIN (YES output of block 290), impact time CLOSE_TIME is compared with maximum time value CLOSE_TIME_MAX (block 300).

If impact time CLOSE_TIME is below maximum time value CLOSE_TIME_MAX (NO output of block 300), the operations described with reference to block 210 onwards are repeated. Conversely, if impact time CLOSE_TIME is

above maximum time value CLOSE_TIME_MAX (YES output of block 300), the operations described with reference to block 140 onwards are repeated.

In block 310 - which, as stated, is arrived at when event counter AMA_SX_EVENT is above minimum event value EVENT_MIN_AMA (YES output of block 240), and also when event counter AMA_DX_EVENT is above minimum event value EVENT_MIN_AMA (YES output of block 280) - impact time CLOSE_TIME is compared with minimum time value CLOSE_TIME_MIN.

If impact time CLOSE_TIME is above minimum time value CLOSE_TIME_MIN (YES output of block 310), a check is made to determine pedestrian impact against front bumper 8 of vehicle 1 (block 320). Conversely, if impact time CLOSE_TIME is below minimum time value CLOSE_TIME_MIN (NO output of block 310), mean impact signal CMA is compared with minimum impact value V_MIN (block 330).

If mean impact signal CMA is below minimum impact value V_MIN (NO output of block 330), the operations described with reference to block 140 onwards are repeated. Conversely, if mean impact signal CMA is above minimum impact value V_MIN (YES output of block 330), the operations described with reference to block 310 onwards are repeated.

Figure 4 shows a flow chart of the operations performed in the second routine to determine pedestrian impact against bumper 8 of vehicle 1 on the basis of

right speed signal VEL_DX and left speed signal VEL_SX taken individually.

As shown in Figure 4, left speed signal VEL_SX is first compared with minimum and maximum speed values VEL_SX_MIN and VEL_SX_MAX (block 410).

If left speed signal VEL_SX is outside the range defined by minimum and maximum speed values VEL_SX_MIN and VEL_SX_MAX (NO output of block 410), the event counter VEL_SX_EVENT is reset (block 420), and the operations described below with reference to block 450 are performed. Conversely, if left speed signal VEL_SX is within the range defined by minimum and maximum speed values VEL_SX_MIN and VEL_SX_MAX (YES output of block 410), the event counter VEL_SX_EVENT is incremented one unit (block 430).

The event counter VEL_SX_EVENT is then compared with the minimum event value EVENT_MIN_VEL (block 440). If counter VEL_SX_EVENT is below minimum event value EVENT_MIN_VEL (NO output of block 440), the operations described below with reference to block 450 are performed. Conversely, if counter VEL_SX_EVENT is above minimum event value EVENT_MIN_VEL (YES output of block 440), the operations described below with reference to block 510 are performed.

In block 450 - which, as stated, is arrived at when event counter VEL_SX_EVENT is below minimum event value EVENT_MIN_VEL (NO output of block 440), and also when event counter VEL_SX_EVENT is reset (block 420) - the

right speed signal VEL_DX is compared with minimum and maximum speed values VEL_DX_MIN and VEL_DX_MAX.

If right speed signal VEL_DX is outside the range defined by minimum and maximum speed values VEL_DX_MIN and VEL_DX_MAX (NO output of block 450), event counter VEL_DX_EVENT is reset (block 460), and the operations described below with reference to block 490 are performed. Conversely, if right speed signal VEL_DX is within the range defined by minimum and maximum speed values VEL_DX_MIN and VEL_DX_MAX (YES output of block 450), event counter VEL_DX_EVENT is incremented one unit (block 470).

Event counter VEL_DX_EVENT is then compared with minimum event value EVENT_MIN_VEL (block 480). If event counter VEL_DX_EVENT is below minimum event value EVENT_MIN_VEL (NO output of block 480), the operations described below with reference to block 490 are performed. Conversely, if event counter VEL_DX_EVENT is still above minimum event value EVENT_MIN_VEL (YES output of block 480), the operations described below with reference to block 510 are performed.

In block 490 - which, as stated, is arrived at when event counter VEL_DX_EVENT is below minimum event value EVENT_MIN_VEL (NO output of block 480), and also when event counter VEL_DX_EVENT is reset (block 460) - mean impact signal CMA is compared with minimum impact value V_MIN.

If mean impact signal CMA is below minimum impact

value V_MIN (NO output of block 490), the operations described with reference to block 140 onwards are repeated. Conversely, if mean impact signal CMA is above minimum impact value V_MIN (YES output of block 490), impact time CLOSE_TIME is compared with maximum time value CLOSE_TIME_MAX (block 500).

If impact time CLOSE_TIME is below maximum time value CLOSE_TIME_MAX (NO output of block 500), the operations described with reference to block 410 onwards are repeated. Conversely, if impact time CLOSE_TIME is above maximum time value CLOSE_TIME_MAX (YES output of block 500), the operations described with reference to block 140 onwards are repeated.

In block 510 - which, as stated, is arrived at when event counter VEL_SX_EVENT is above minimum event value EVENT_MIN_VEL (YES output of block 440), and also when event counter VEL_DX_EVENT is above minimum event value EVENT_MIN_VEL (YES output of block 480) - impact time CLOSE_TIME is compared with minimum time value CLOSE_TIME_MIN.

If impact time CLOSE_TIME is above minimum time value CLOSE_TIME_MIN (YES output of block 510), a check is made to determine pedestrian impact against front bumper 8 of vehicle 1 (block 520). Conversely, if impact time CLOSE_TIME is below minimum time value CLOSE_TIME_MIN (NO output of block 510), mean impact signal CMA is compared with minimum impact value V_MIN (block 530).

If mean impact signal CMA is below minimum impact value V_MIN (NO output of block 530), the operations described with reference to block 140 onwards are repeated. Conversely, if mean impact signal CMA is above minimum impact value V_MIN (YES output of block 530), the operations described with reference to block 510 onwards are repeated.

Figure 5 shows a flow chart of the operations performed by the third routine to determine pedestrian impact against bumper 8 of vehicle 1 on the basis of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX combined, and on the basis of right speed signal VEL_DX and left speed signal VEL_SX combined.

This routine is based on the following principle. If the amplitude of a mean left acceleration signal AMA_SX is represented in an X,Y cartesian diagram as a function of the amplitude of a mean right acceleration signal AMA_DX, a lobe is obtained, which slopes more or less with respect to the two axes depending on which of the two amplitudes is greater, i.e. depending on where impact against front bumper 8 of vehicle 1 occurs.

That is, as shown in Figure 6, in the event of impact against a right portion of front bumper 8, the resulting lobe is closer to the mean right acceleration signal AMA_DX axis, since the amplitude of mean right acceleration signal AMA_DX is greater than that of mean left acceleration signal AMA_SX. Conversely, in the event

of impact against a left portion of front bumper 8, the resulting lobe is closer to the mean left acceleration signal AMA_SX axis, since the amplitude of mean left acceleration signal AMA_SX is greater than that of mean right acceleration signal AMA_DX. Whereas, in the event of impact against a central portion of front bumper 8, the resulting lobe is located between the first two, since the amplitude of mean right acceleration signal AMA_DX substantially equals that of mean left acceleration signal AMA_SX.

Now, by representing on the cartesian diagram all the lobes relating to a series of other than pedestrian impacts against front bumper 8 of vehicle 1 - which, as stated, do not call for activation of bonnet actuating assembly 2, and the characteristics of which can be defined by specific standards issued by appropriate authorities or directly by the vehicle manufacturer - a step line can be drawn substantially representing the envelope of all these lobes, and which divides the cartesian diagram into two areas : the area (hatched) bounded by the step line represents points involving other than pedestrian impact and therefore not requiring activation of bonnet actuating assembly 2, and the remaining area of the diagram represents points involving pedestrian impact and therefore requiring activation of bonnet actuating assembly 2. The step line defines the threshold TH_AMA referred to above with reference to block 80, and with which mean right acceleration signal

AMA_DX and mean left acceleration signal AMA_SX, taken together, are compared.

The same also applies to right speed signal VEL_DX and left speed signal VEL_SX, thus allowing to define the threshold TH_VEL referred to above with reference to block 80, and with which right speed signal VEL_DX and left speed signal VEL_SX are compared (Figure 7). The only difference with respect to threshold TH_AMA is that representing the amplitude of a left speed signal VEL_SX as a function of that of a right speed signal VEL_DX on an X,Y cartesian diagram produces a line as opposed to a lobe.

As shown in Figure 5, the third routine therefore determines whether the point defined by the amplitudes of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX falls within the area bounded by the step line defining threshold TH_AMA, and whether the point defined by the amplitudes of right speed signal VEL_DX and left speed signal VEL_SX falls within the area bounded by the step line defining threshold TH_VEL (block 600).

More specifically, the amplitudes of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX are actually compared with threshold TH_AMA by comparing them with individual threshold values defining the various portions of the threshold TH_AMA step pattern. More specifically, in the event of impact against the right portion of front bumper 8 of vehicle 1,

the amplitude of mean right acceleration signal AMA_DX is compared with a threshold value defining the bottom right horizontal portion of threshold TH_AMA in Figure 6; in the event of impact against the left portion of front bumper 8 of vehicle 1, the amplitude of mean left acceleration signal AMA_SX is compared with a threshold value defining the top left vertical portion of threshold TH_AMA in Figure 6; and, in the event of impact against the central portion of front bumper 8 of vehicle 1, the amplitude of mean right acceleration signal AMA_DX and the amplitude of mean left acceleration signal AMA_SX are compared with respective threshold values defining the horizontal and vertical central portions of threshold TH_AMA in Figure 6.

The same obviously also applies when comparing the amplitudes of right speed signal VEL_DX and left speed signal VEL_SX with threshold TH_VEL.

If both points defined respectively by the amplitudes of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX, and by the amplitudes of right speed signal VEL_DX and left speed signal VEL_SX, are outside the areas bounded by respective thresholds TH_AMA and TH_VEL (YES output of block 600), this indicates pedestrian impact against front bumper 8 of vehicle 1 (block 610). Conversely, if even only one of the two points defined respectively by the amplitudes of mean right acceleration signal AMA_DX and mean left acceleration signal AMA_SX, and by the

amplitudes of right speed signal VEL_DX and left speed signal VEL_SX, lies within the area bounded by the respective threshold TH_AMA or TH_VEL (NO output of block 600), this indicates other than pedestrian impact against front bumper 8 of vehicle 1 (block 620).

The advantages of the present invention will be clear from the foregoing description.

In particular, tests have shown that the proposed solution provides for drastically reducing spurious activation of bonnet actuating assembly 2.

Clearly, changes may be made to the control method as described and illustrated herein without, however, departing from the scope of the present invention as defined in the accompanying Claims.

For example, as opposed to using two acceleration signals, one right and one left, each of the two routines for determining pedestrian impact against front bumper 8 of vehicle 1, as described with reference to blocks 170 and 180 in Figure 2 and the Figure 3 and 4 flow charts, may be performed using one acceleration signal generated by one acceleration sensor suitably located on the front bumper of the vehicle.

Regardless of whether one or two acceleration signals are used, pedestrian impact may be determined using the acceleration signal/s directly, without calculating the mobile average.

Moreover, pedestrian impact against front bumper 8 of vehicle 1 may even be determined using only one of the

two routines, and therefore based solely on either the mean acceleration signal/s (or directly on the acceleration signal/s) or the speed signal/s (in turn generated from the mean acceleration signal/s or acceleration signal/s).

CLAIMS

1) A method of controlling a bonnet actuating assembly (2) of a vehicle (1) to safeguard pedestrians (3) in the event of impact against the front bumper (8) of the vehicle (1), characterized by comprising the steps of:

- acquiring an impact signal (IMPACT, CMA) containing information relating to the presence and/or duration of impact against the front bumper (8);
- acquiring at least one acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) indicating the intensity of impact-induced deceleration of the front bumper (8);
- comparing the impact signal (IMPACT, CMA) and the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) with respective threshold values (V_MIN, AMA_DX_MIN, AMA_DX_MAX, AMA_SX_MIN, AMA_SX_MAX, VEL_DX_MIN, VEL_DX_MAX, VEL_SX_MIN, VEL_SX_MAX, TH_AMA, TH_VEL); and
- determining whether to activate the bonnet actuating assembly (2) on the basis of the outcome of said comparisons.

2) A method as claimed in Claim 1, characterized in that the step of comparing the impact signal and the acceleration signal with respective threshold values comprises the steps of:

- comparing the impact signal (IMPACT, CMA) with a

respective minimum threshold value (V_MIN);

- comparing the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) with a respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN);

and in that the step of determining whether to activate the bonnet actuating assembly (2) comprises the step of:

- activating the bonnet actuating assembly (2) when the impact signal (IMPACT, CMA) satisfies a first predetermined relationship with the respective minimum threshold value (V_MIN) at least for a predetermined minimum time (CLOSE_TIME_MIN), and the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) satisfies a second predetermined relationship with the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN) at least for a predetermined minimum time (EVENT_MIN_AMA, EVENT_MIN_VEL).

3) A method as claimed in Claim 2, characterized in that the step of determining whether to activate the bonnet actuating assembly (2) also comprises the step of:

- not activating the bonnet actuating assembly (2) when the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) fails to satisfy the second predetermined relationship with the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN) at least for a predetermined minimum time

(EVENT_MIN_AMA, EVENT_MIN_VEL) within a predetermined maximum time (CLOSE_TIME_MAX) from when the impact signal (IMPACT, CMA) satisfies the first predetermined relationship with the respective minimum threshold value (V_MIN).

4) A method as claimed in Claim 2 or 3, characterized in that the first predetermined relationship is defined by the condition that the impact signal (IMPACT, CMA) be above the respective minimum threshold value (V_MIN), and in that the second predetermined relationship is defined by the condition that the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) be above the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN).

5) A method as claimed in any one of Claims 2 to 4, characterized in that the comparing step also comprises the step of:

- comparing the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) with a respective maximum threshold value (AMA_DX_MAX, AMA_SX_MAX, VEL_DX_MAX, VEL_SX_MAX);

and in that the step of determining whether to activate the bonnet actuating assembly (2) also comprises the step of:

- activating the bonnet actuating assembly (2) when the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) also satisfies a third predetermined

relationship with the respective maximum threshold value (AMA_DX_MAX, AMA_SX_MAX, VEL_DX_MAX, VEL_SX_MAX).

6) A method as claimed in Claim 5, characterized in that the third predetermined relationship is defined by the condition that the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) be below the respective maximum threshold value (AMA_DX_MAX, AMA_SX_MAX, VEL_DX_MAX, VEL_SX_MAX).

7) A method as claimed in Claim 1, characterized in that the step of acquiring at least one acceleration signal comprises the step of:

- acquiring a first acceleration signal (ACC_DX, AMA_DX, VEL_DX) indicating the intensity of impact-induced deceleration of an end portion of the front bumper (8), and a second acceleration signal (ACC_SX, AMA_SX, VEL_SX) indicating the intensity of impact-induced deceleration of an opposite end portion of the front bumper (8).

8) A method as claimed in Claim 7, characterized in that the step of comparing the impact signal and the acceleration signal with respective threshold values comprises the steps of:

- comparing the impact signal (IMPACT, CMA) with a respective minimum threshold value (V_MIN);

- comparing the first and second acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) with a respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN);

and in that the step of determining whether to activate the bonnet actuating assembly (2) comprises the step of:

- activating the bonnet actuating assembly (2) when the impact signal (IMPACT, CMA) satisfies a first predetermined relationship with the respective minimum threshold value (V_MIN) at least for a predetermined minimum time (CLOSE_TIME_MIN), and at least the first or second acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) satisfies a second predetermined relationship with the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN) at least for a predetermined minimum time (EVENT_MIN_AMA, EVENT_MIN_VEL).

9) A method as claimed in Claim 8, characterized in that the step of determining whether to activate the bonnet actuating assembly (2) also comprises the step of:

- not activating the bonnet actuating assembly (2) when neither the first nor second acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) satisfies the second predetermined relationship with the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN) at least for a predetermined minimum time (EVENT_MIN_AMA, EVENT_MIN_VEL) within a predetermined maximum time (CLOSE_TIME_MAX) from when the impact signal (IMPACT, CMA) satisfies the first predetermined relationship with the respective minimum threshold value (V_MIN).

10) A method as claimed in Claim 8 or 9, characterized in that the first predetermined relationship is defined by the condition that the impact signal (IMPACT, CMA) be above the respective minimum threshold value (V_MIN), and in that the second predetermined relationship is defined by the condition that the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) be above the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN).

11) A method as claimed in any one of Claims 8 to 10, characterized in that the step of comparing the impact signal and the first and second acceleration signal with respective threshold values also comprises the steps of:

- comparing the first and second acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) with a respective maximum threshold value (AMA_DX_MAX, AMA_SX_MAX, VEL_DX_MAX, VEL_SX_MAX);

and in that the step of determining whether to activate the bonnet actuating assembly (2) also comprises the step of:

- activating the bonnet actuating assembly (2) when the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) satisfying the second predetermined relationship with the respective minimum threshold value (AMA_DX_MIN, AMA_SX_MIN, VEL_DX_MIN, VEL_SX_MIN) at least for a predetermined minimum time (EVENT_MIN_AMA,

EVENT_MIN_VEL) also satisfies a third predetermined relationship with the respective maximum threshold value (AMA_DX_MAX, AMA_SX_MAX, VEL_DX_MAX, VEL_SX_MAX).

12) A method as claimed in Claim 11, characterized in that the third predetermined relationship is defined by the condition that the acceleration signal (ACC_DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) is below the respective maximum threshold value (AMA_DX_MAX, AMA_SX_MAX, VEL_DX_MAX, VEL_SX_MAX).

13) A method as claimed in any one of Claims 7 to 12, characterized in that the step of comparing the impact signal and the acceleration signal with respective threshold values comprises the steps of:

- comparing the impact signal (IMPACT, CMA) with a respective minimum threshold value (V_MIN);

- dividing a diagram of the amplitudes of said first and said second acceleration signal (ACC-DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) into a first and a second area (TH_AMA, TH_VEL), said first area being defined by the amplitudes of said first and said second acceleration signal generated by impact of a pedestrian against said front bumper (8), and said second area being defined by the amplitudes of said first and said second acceleration signal generated by impact of an object other than a pedestrian against said front bumper (8);

and in that the step of determining whether to activate the bonnet actuating assembly (2) comprises the step of:

- activating the bonnet actuating assembly (2) when the impact signal (IMPACT, CMA) satisfies a first predetermined relationship with the respective minimum threshold value (V_MIN) at least for a predetermined minimum time (CLOSE_TIME_MIN), and the amplitudes of said first and said second acceleration signal (ACC-DX, ACC_SX, AMA_DX, AMA_SX, VEL_DX, VEL_SX) lie within said first area (TH_AMA, TH_VEL).

14) A method as claimed in any one of the foregoing Claims, characterized in that said acceleration signal is an acceleration signal generated by an impact sensor (7) located on the front bumper (8) of the vehicle (1).

15) A method as claimed in any one of Claims 1 to 13, characterized in that said acceleration signal is the mobile average of an acceleration signal generated by an impact sensor (7) located on the front bumper (8) of the vehicle (1).

16) A method as claimed in any one of Claims 1 to 13, characterized in that said acceleration signal is the time integral of an acceleration signal generated by an impact sensor (7) located on the front bumper (8) of the vehicle (1).

17) A method as claimed in any one of Claims 1 to 13, characterized in that said acceleration signal is the time integral of the mobile average of an acceleration signal generated by an impact sensor (7) located on the front bumper (8) of the vehicle (1).

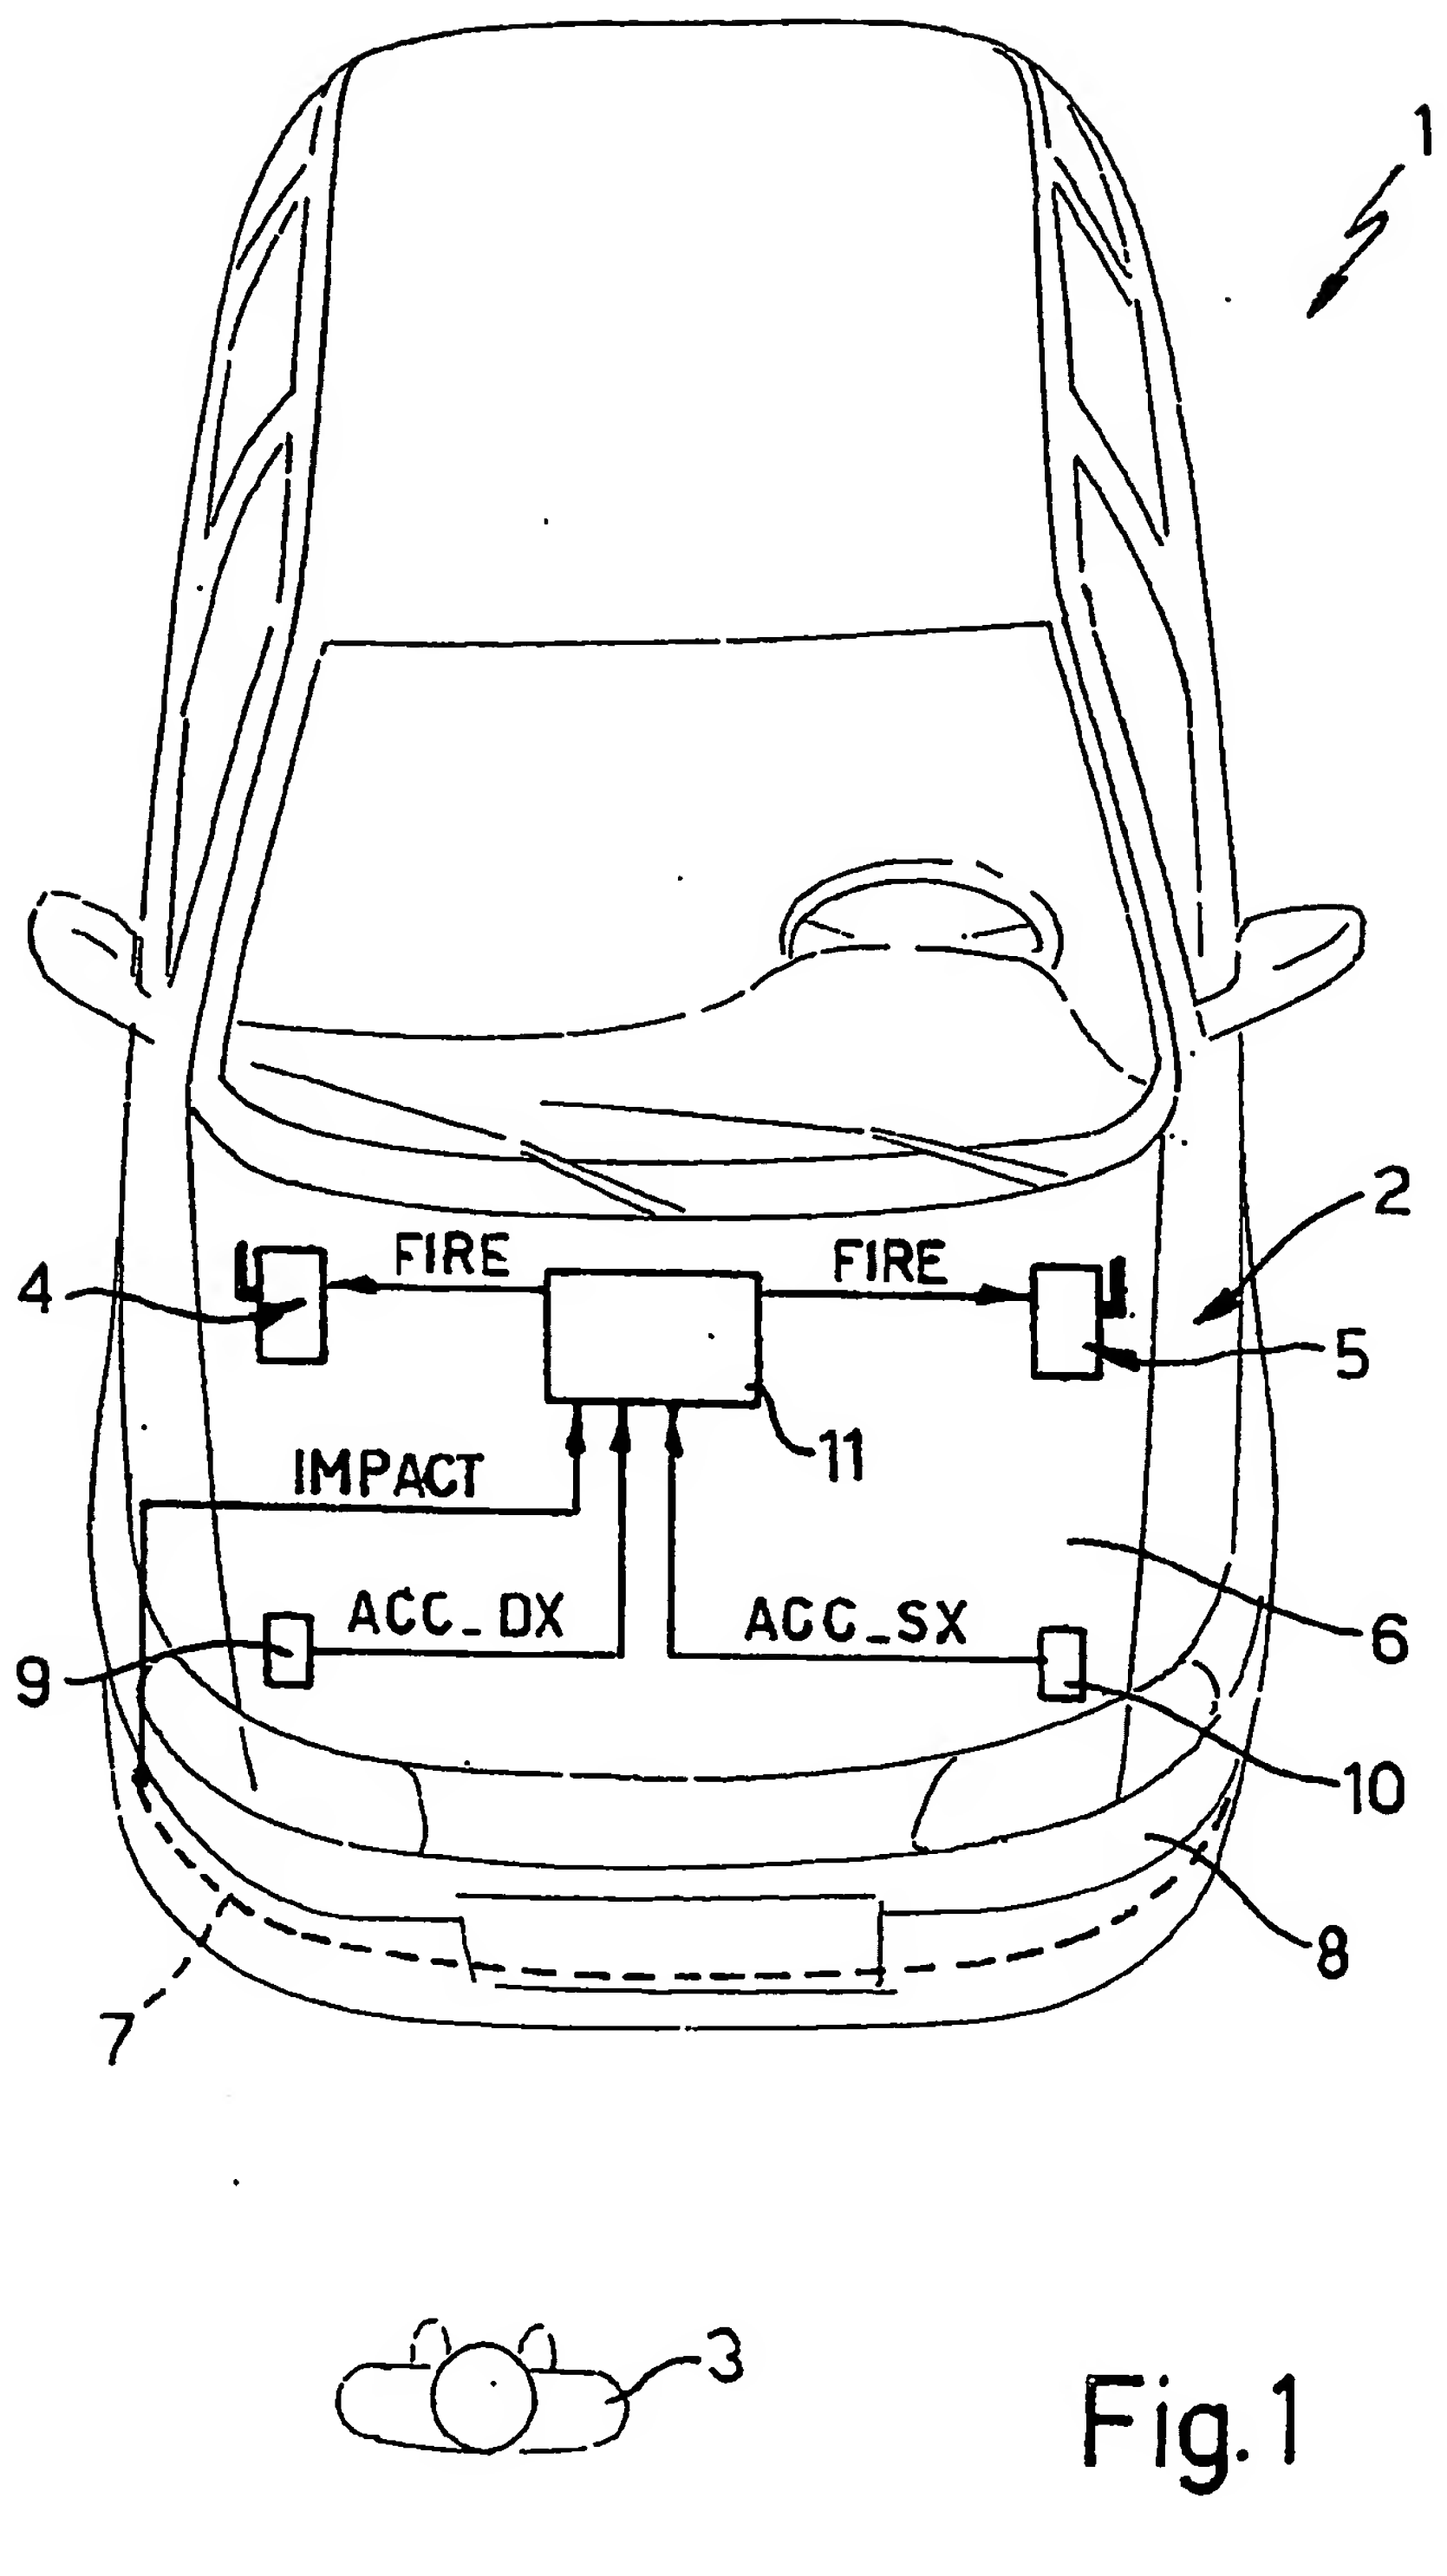

Fig.1

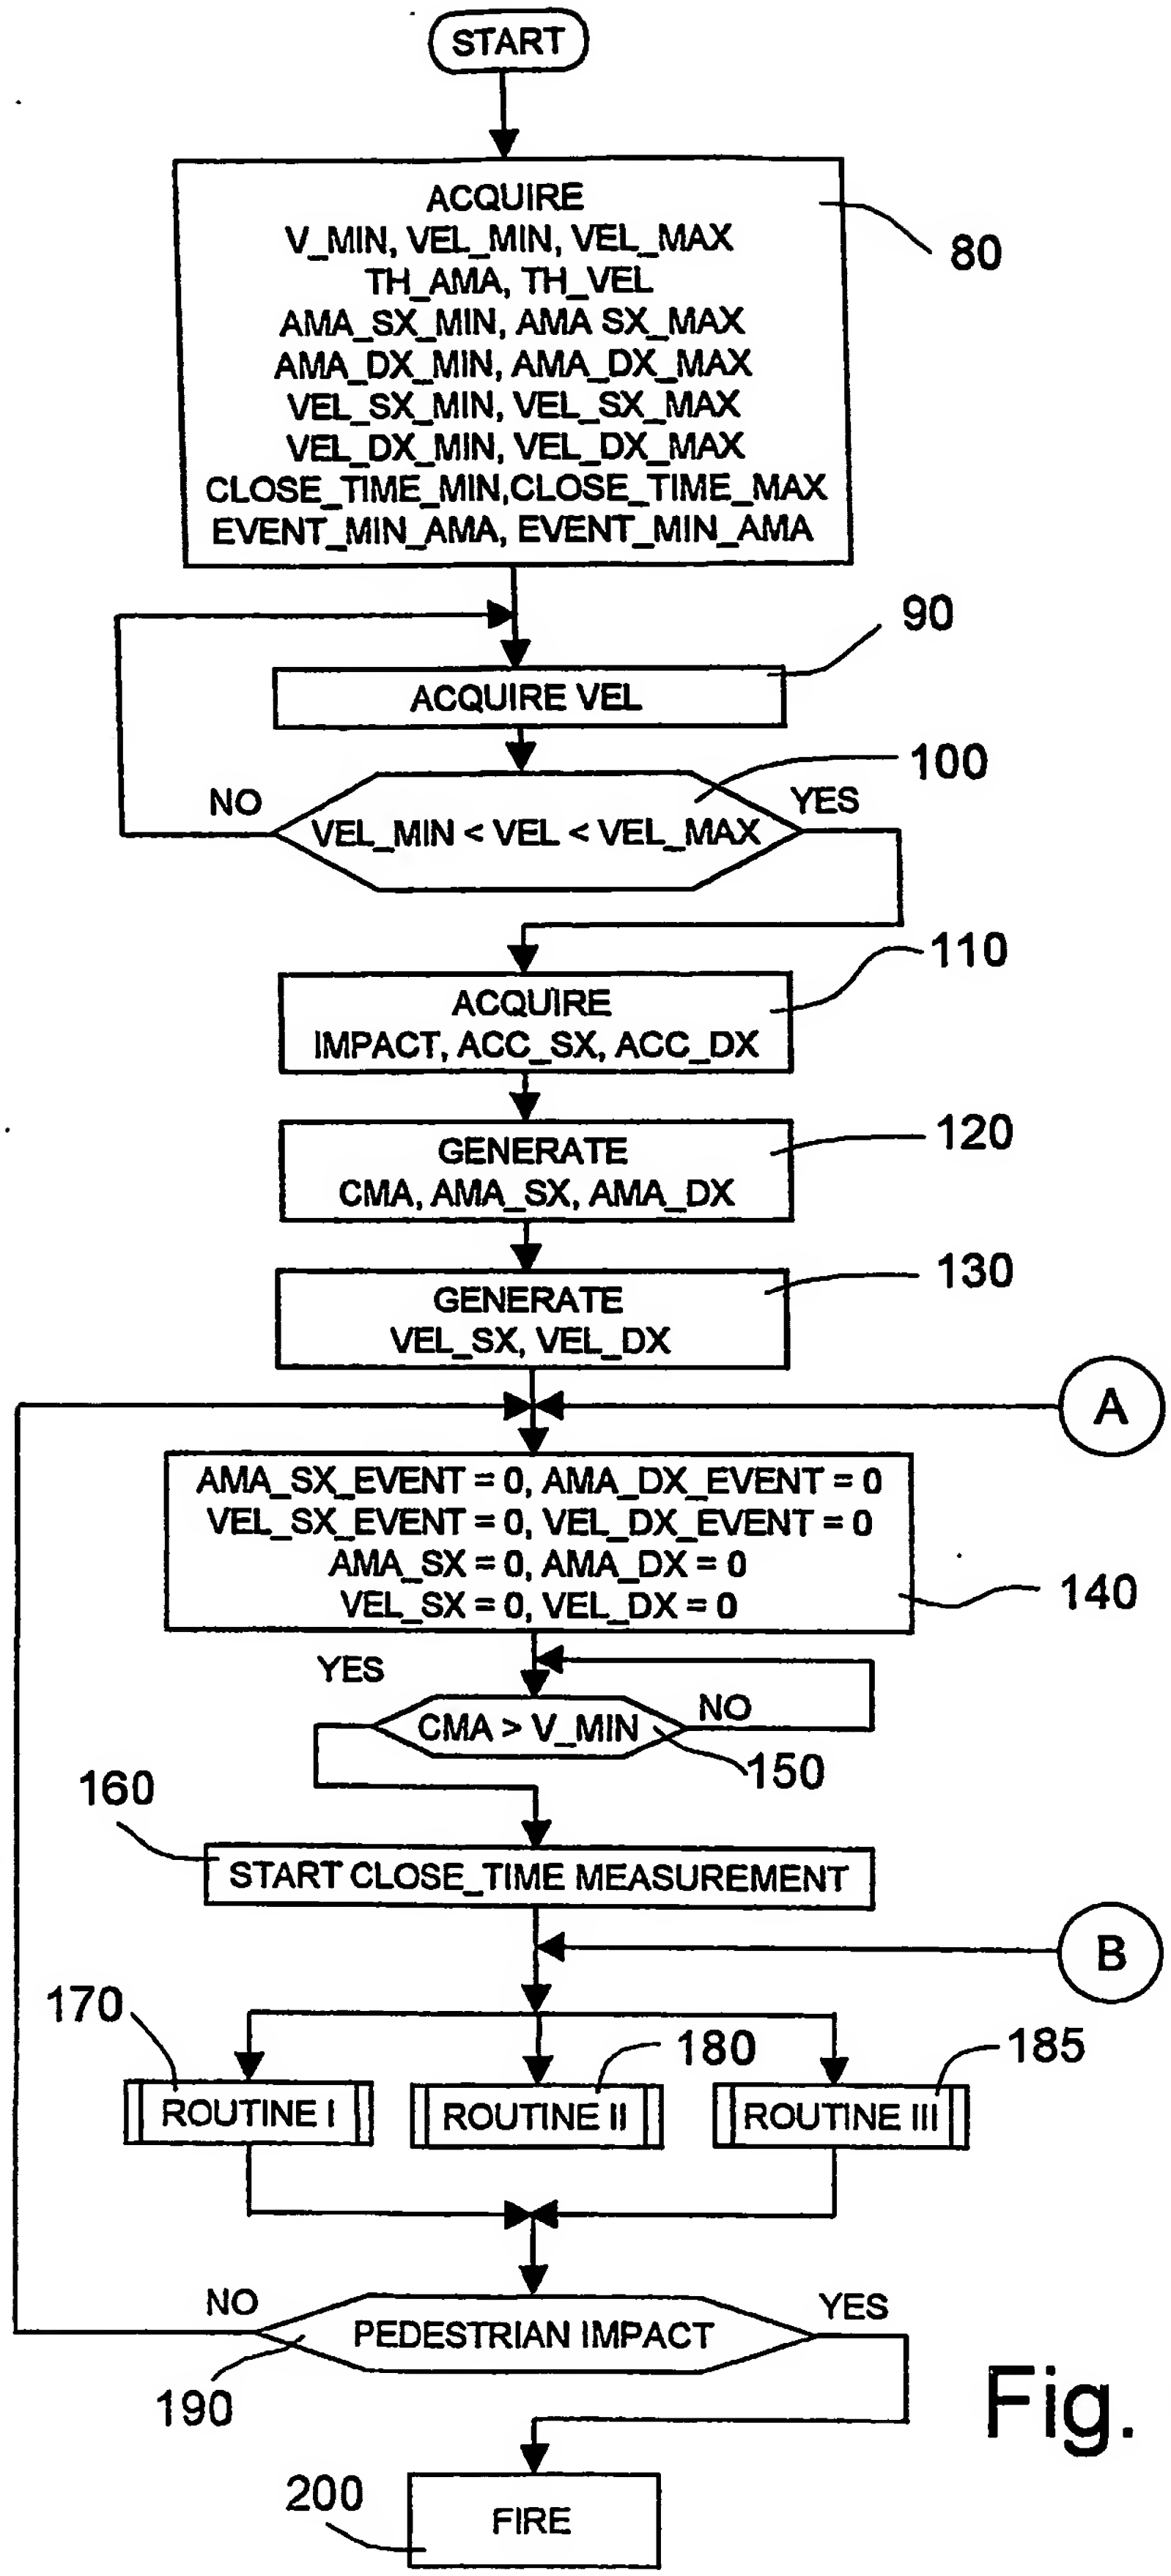
START
ACQUIRE
V_MIN, VEL_MIN, VEL_MAX
TH_AMA, TH_VEL
AMA_SX_MIN, AMA SX_MAX
AMA_DX_MIN, AMA_DX_MAX
VEL_SX_MIN, VEL_SX_MAX
VEL_DX_MIN, VEL_DX_MAX
CLOSE_TIME_MIN,CLOSE_TIME_MAX
EVENT_MIN_AMA, EVENT_MIN_AMA
80
90
ACQUIRE VEL
100
NO
YES
VEL_MIN < VEL < VEL_MAX
110
ACQUIRE
IMPACT, ACC_SX, ACC_DX
120
GENERATE
CMA, AMA_SX, AMA_DX
130
GENERATE
VEL_SX, VEL_DX
A
AMA_SX_EVENT = 0, AMA_DX_EVENT = 0
VEL_SX_EVENT = 0, VEL_DX_EVENT = 0
AMA_SX = 0, AMA_DX = 0
VEL_SX = 0, VEL_DX = 0
140
YES
NO
CMA > V_MIN
150
160
START CLOSE_TIME MEASUREMENT
B
170
180
185
ROUTINE I
ROUTINE II
ROUTINE III
NO
YES
PEDESTRIAN IMPACT
190
200
FIRE

Fig. 2

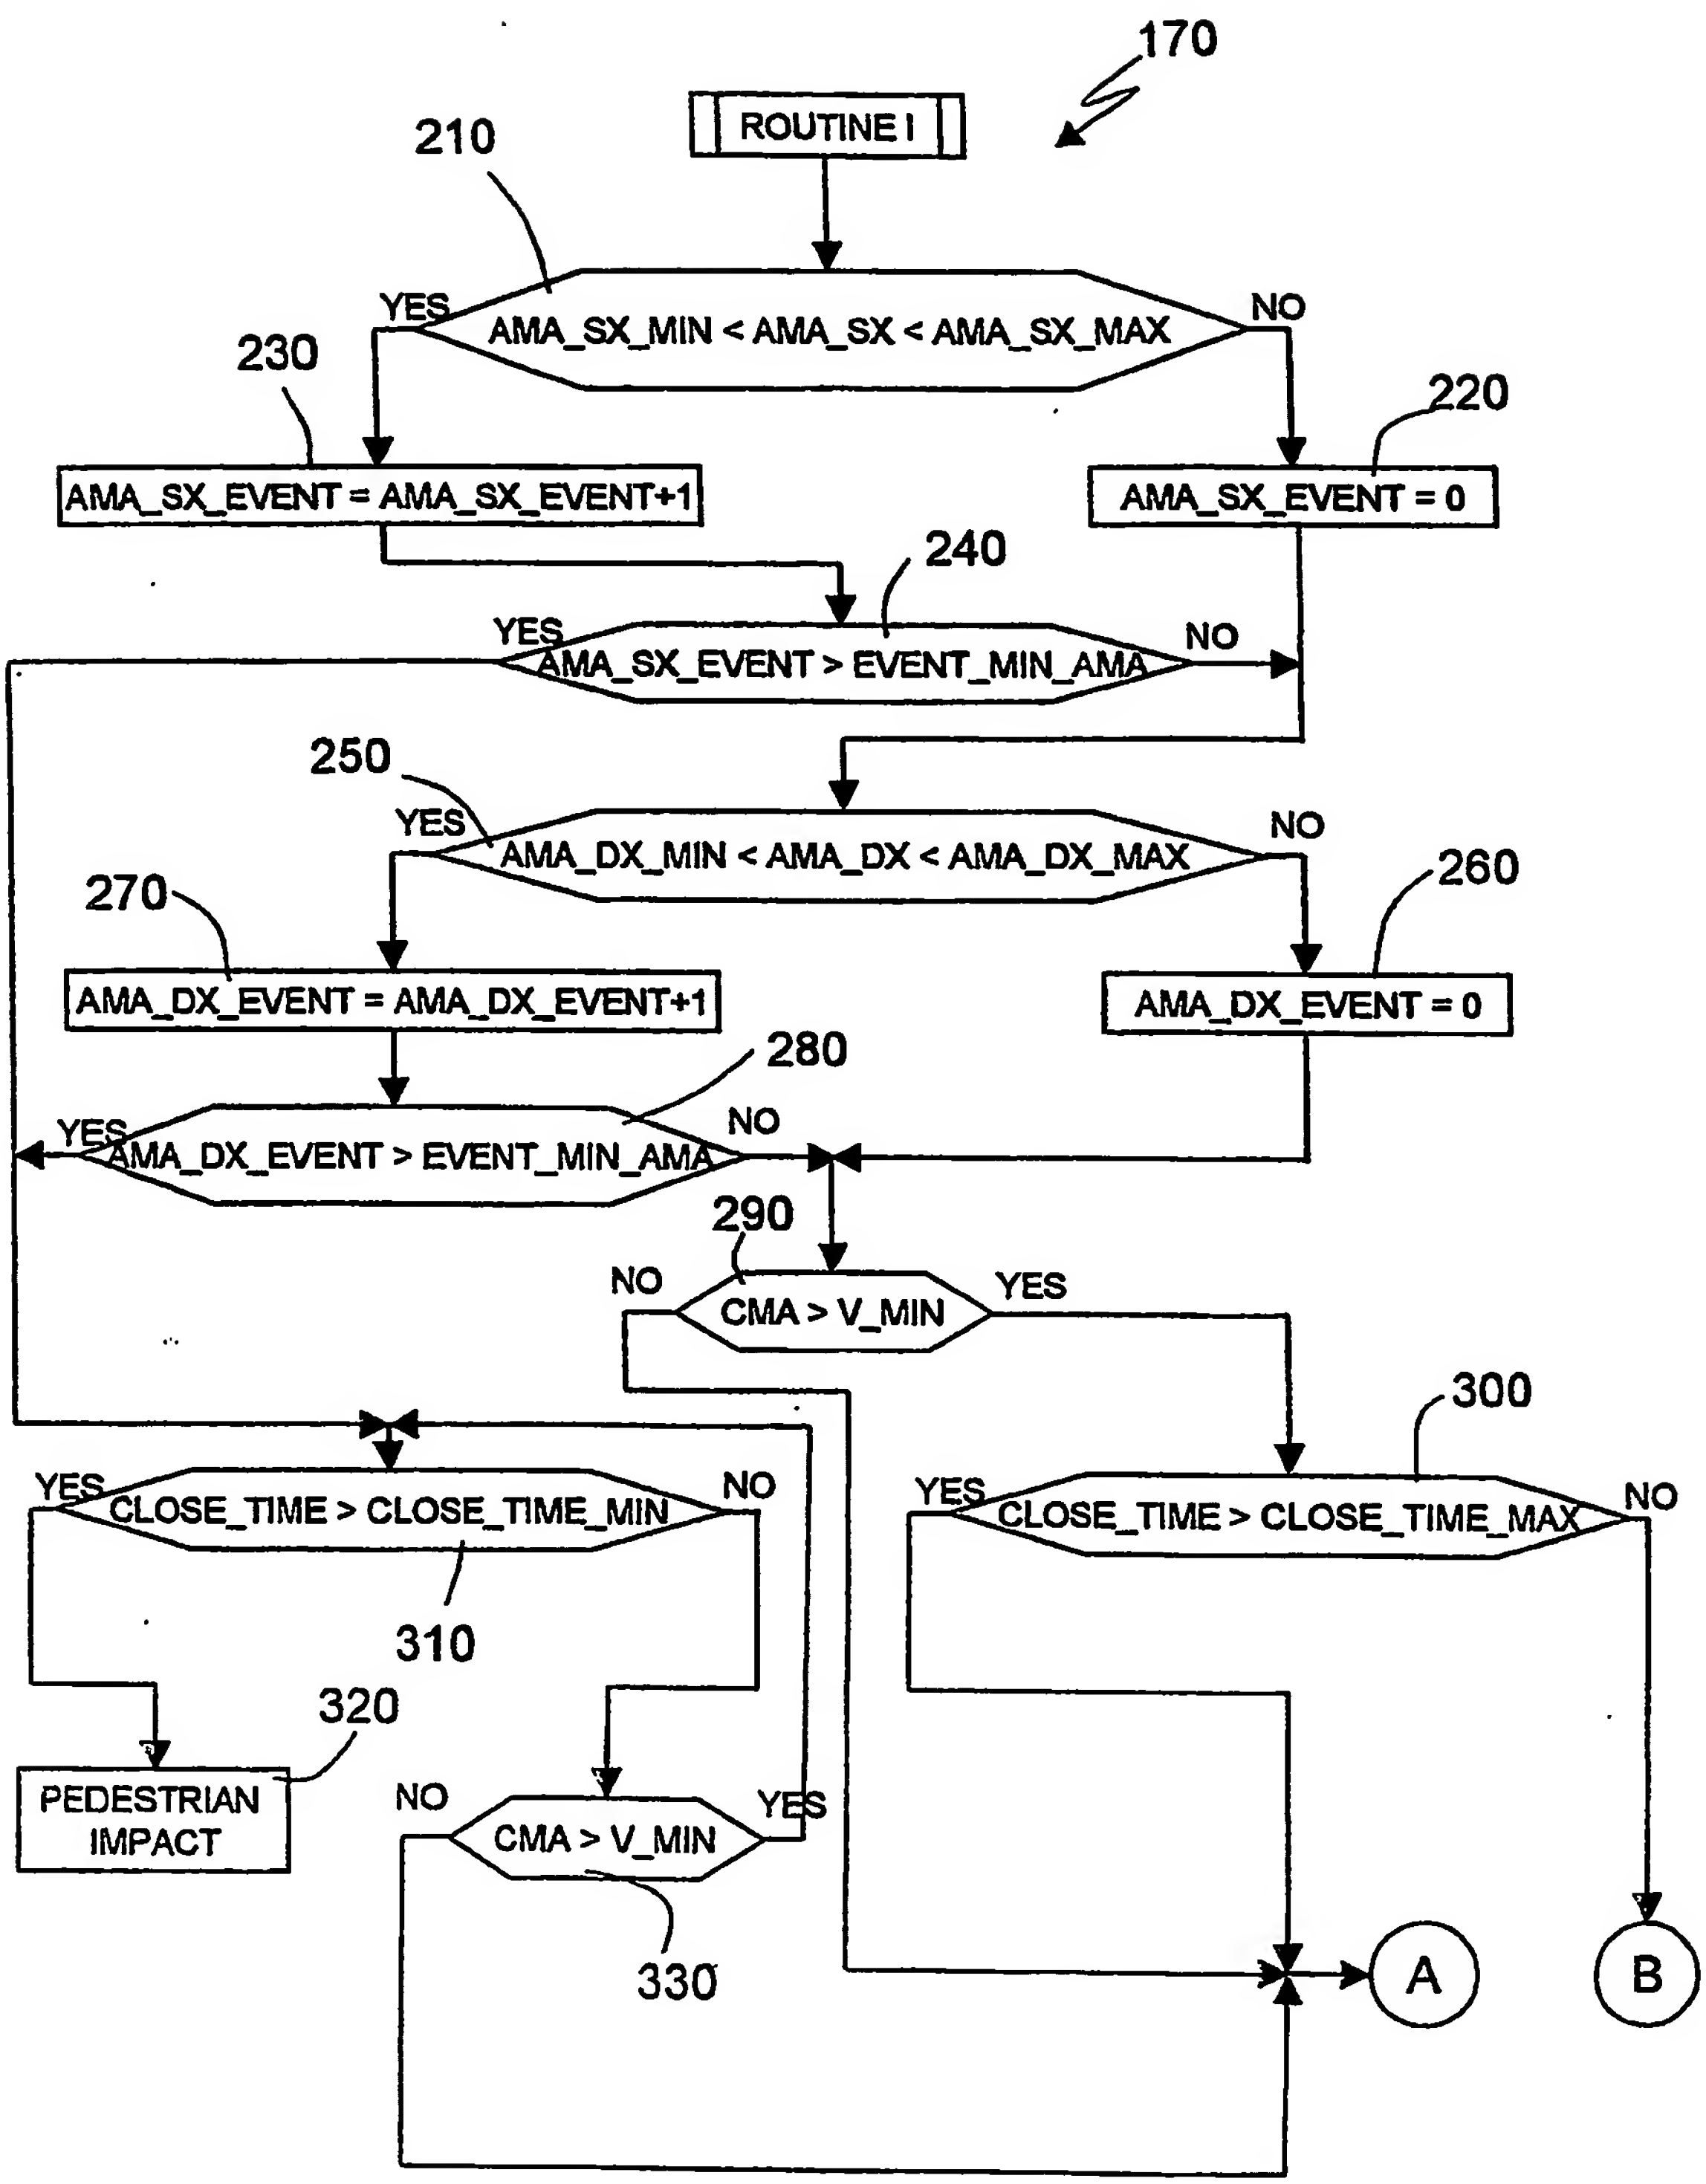
170
ROUTINE I
210
YES
AMA_SX_MIN < AMA_SX < AMA_SX_MAX
NO
230
220
AMA_SX_EVENT = AMA_SX_EVENT+1
AMA_SX_EVENT = 0
240
YES
AMA_SX_EVENT > EVENT_MIN_AMA
NO
250
YES
AMA_DX_MIN < AMA_DX < AMA_DX_MAX
NO
270
260
AMA_DX_EVENT = AMA_DX_EVENT+1
AMA_DX_EVENT = 0
280
YES
AMA_DX_EVENT > EVENT_MIN_AMA
NO
290
NO
CMA > V_MIN
YES
300
YES
CLOSE_TIME > CLOSE_TIME_MIN
NO
YES
CLOSE_TIME > CLOSE_TIME_MAX
NO
310
320
PEDESTRIAN IMPACT
NO
CMA > V_MIN
YES
330
A
B

Fig. 3

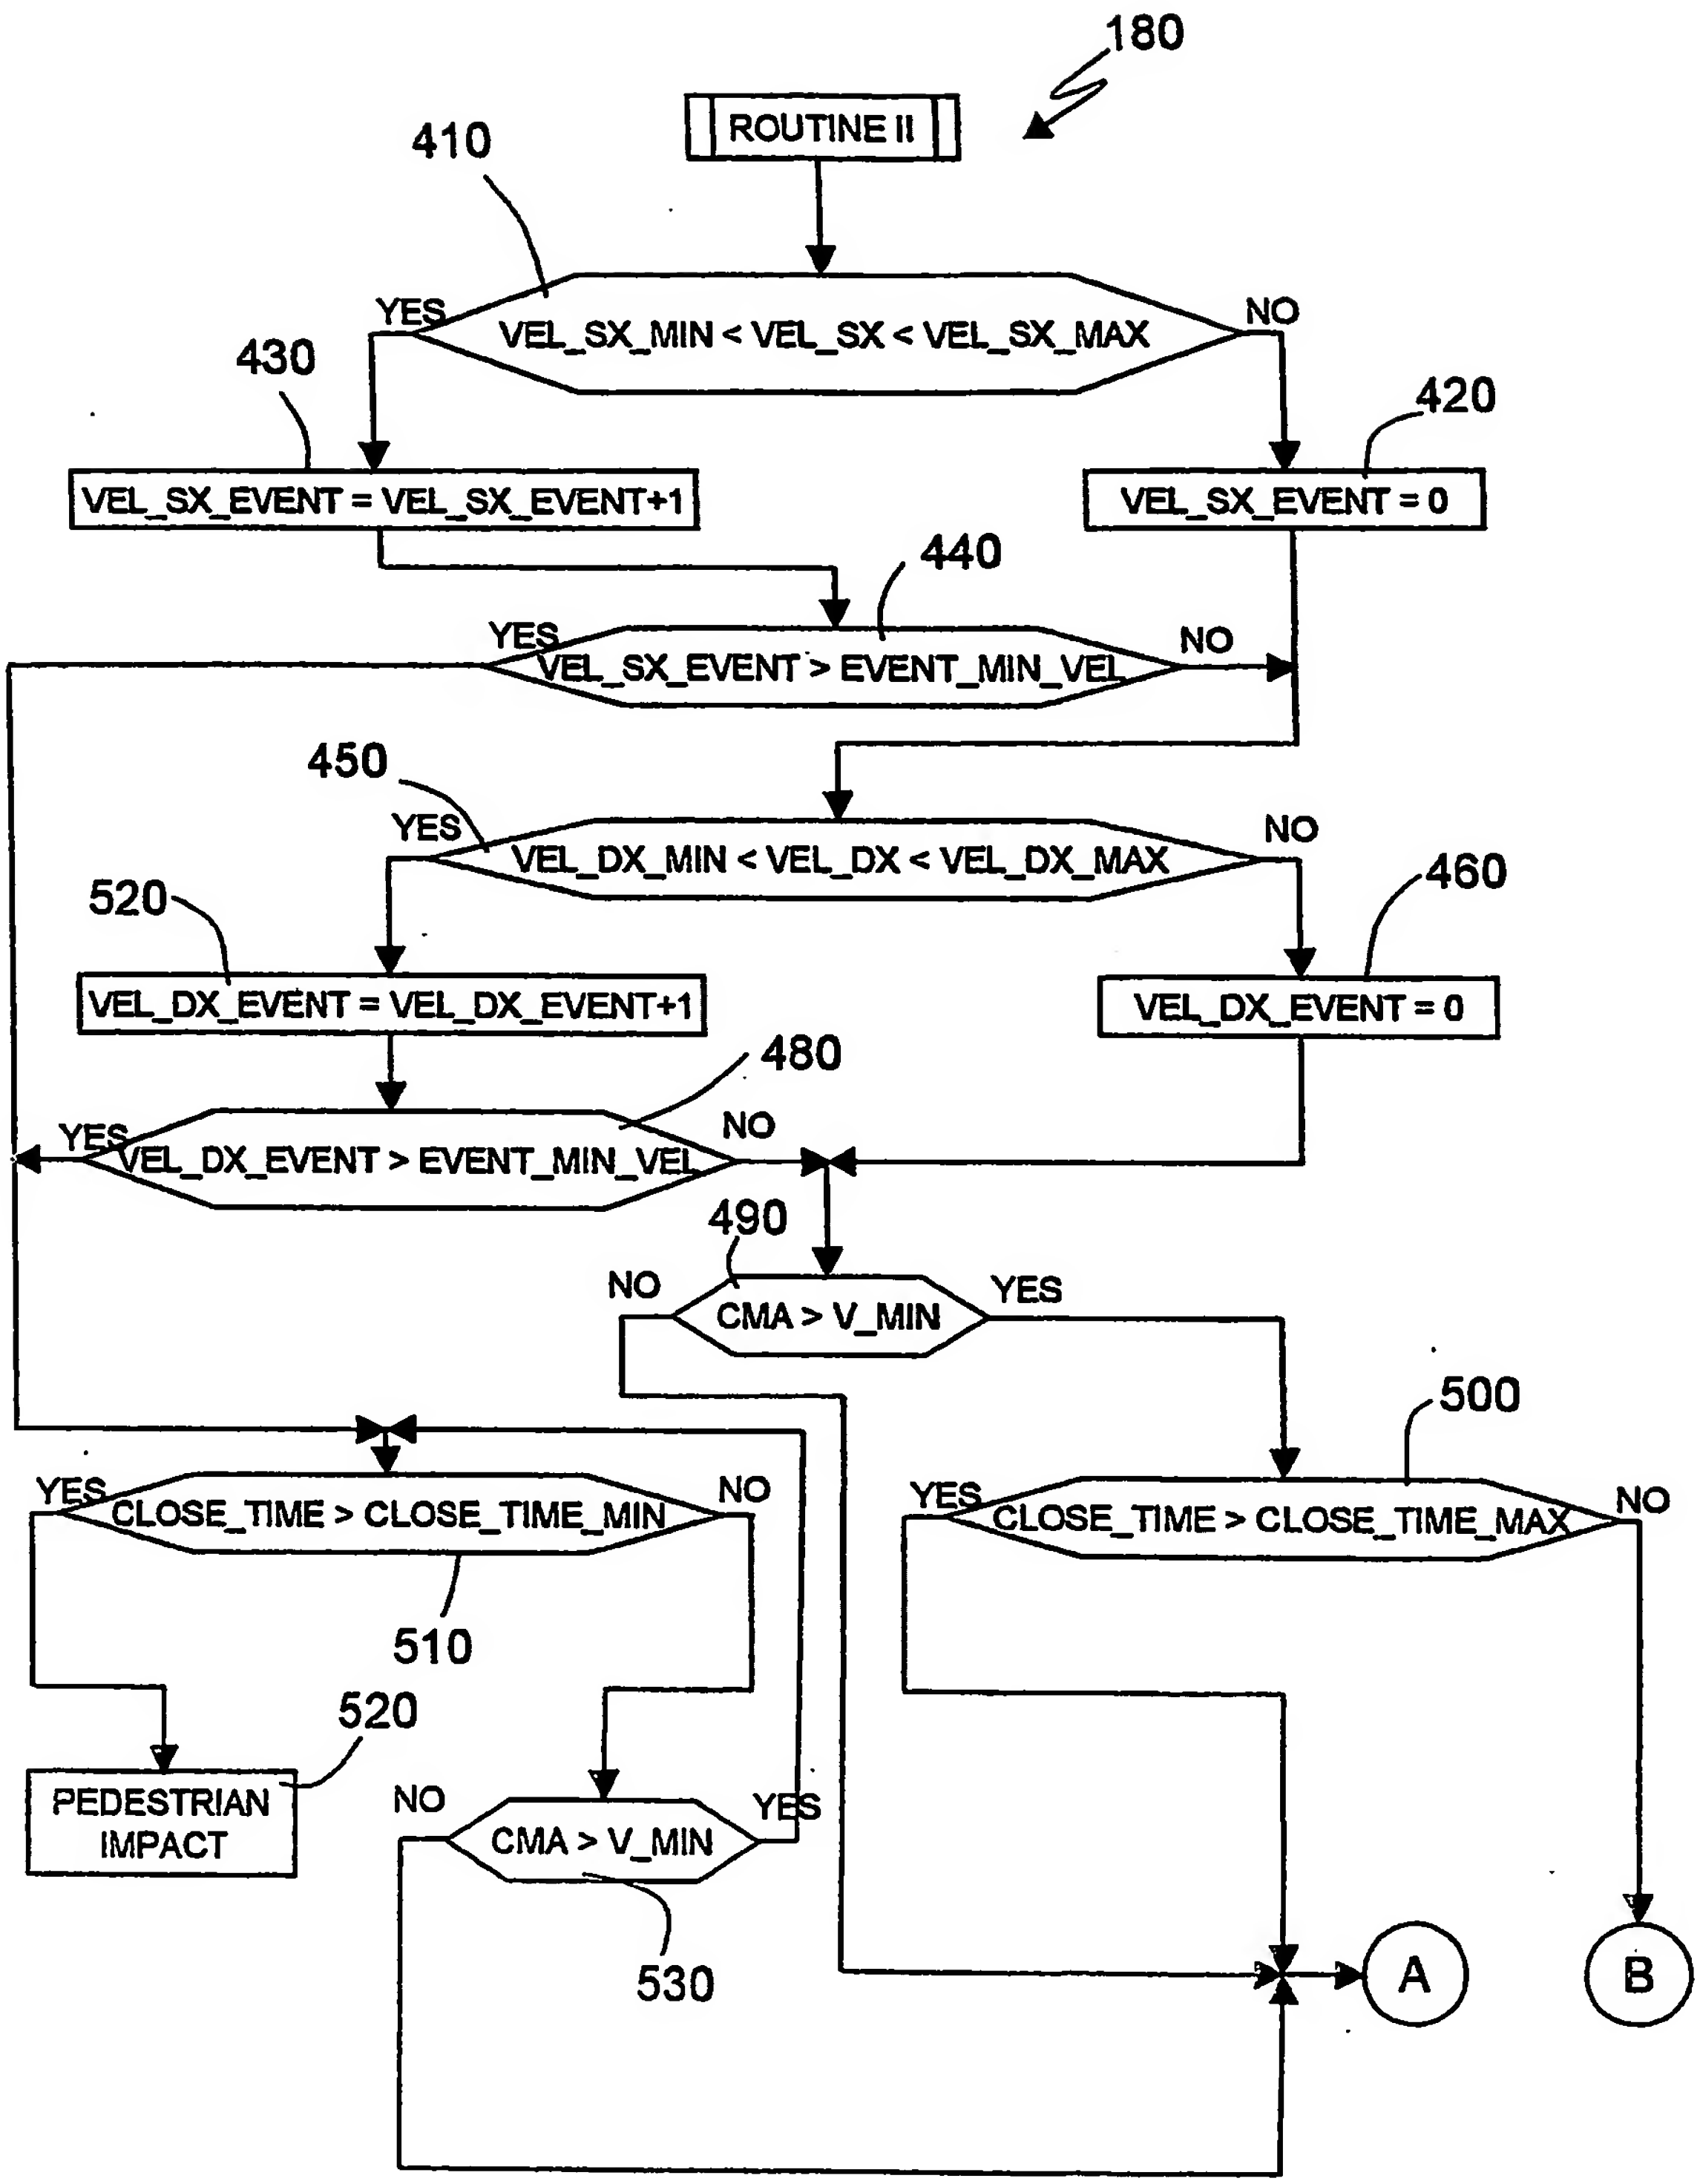

180
ROUTINE II
410
YES
VEL_SX_MIN < VEL_SX < VEL_SX_MAX
NO
430
420
VEL_SX_EVENT = VEL_SX_EVENT+1
VEL_SX_EVENT = 0
440
YES
VEL_SX_EVENT > EVENT_MIN_VEL
NO
450
YES
VEL_DX_MIN < VEL_DX < VEL_DX_MAX
NO
520
460
VEL_DX_EVENT = VEL_DX_EVENT+1
VEL_DX_EVENT = 0
480
YES
VEL_DX_EVENT > EVENT_MIN_VEL
NO
490
NO
CMA > V_MIN
YES
500
YES
CLOSE_TIME > CLOSE_TIME_MIN
NO
YES
CLOSE_TIME > CLOSE_TIME_MAX
NO
510
520
PEDESTRIAN IMPACT
NO
CMA > V_MIN
YES
530
A
B

Fig. 4

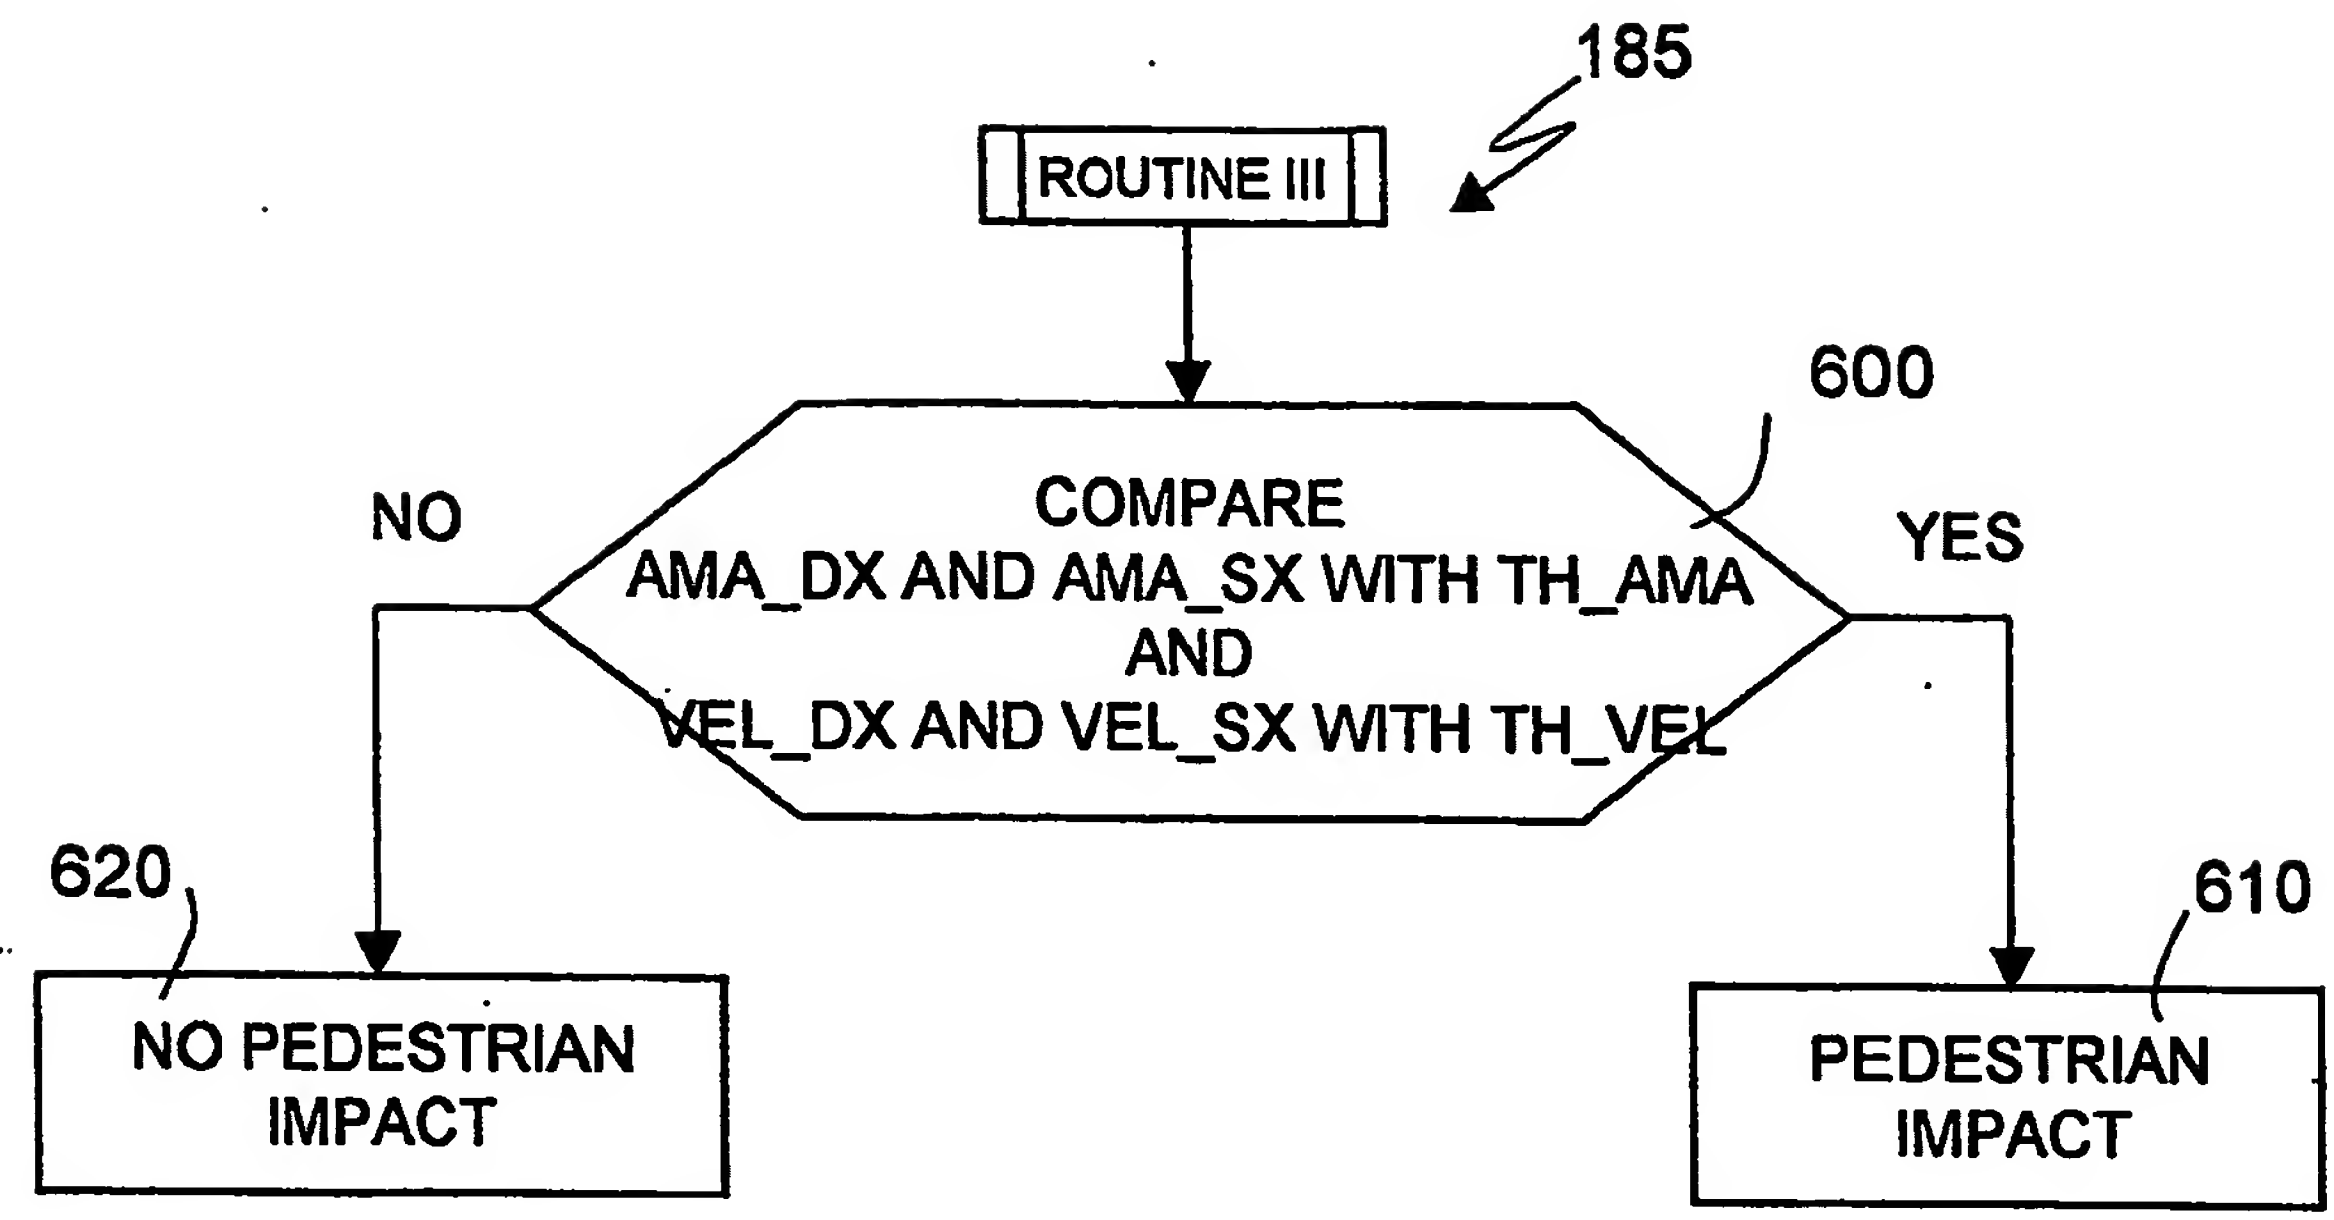

Fig.5

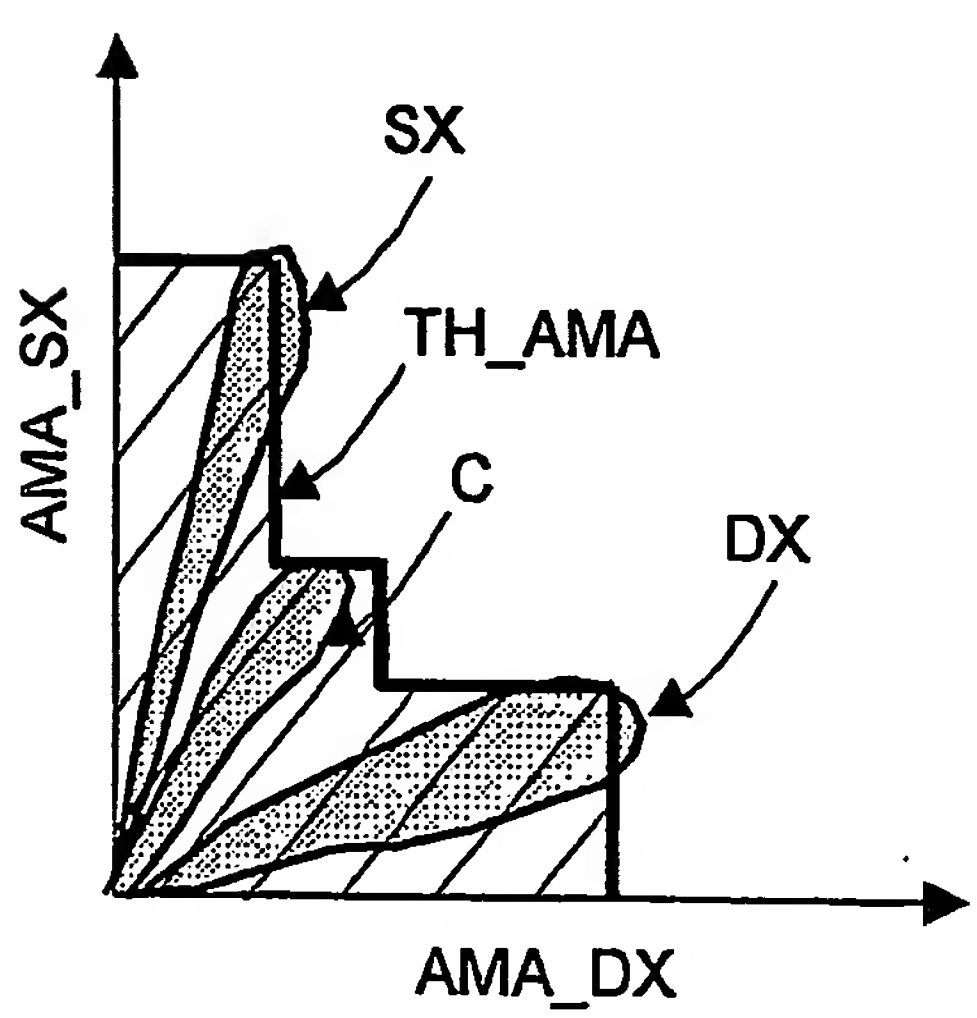

Fig.6

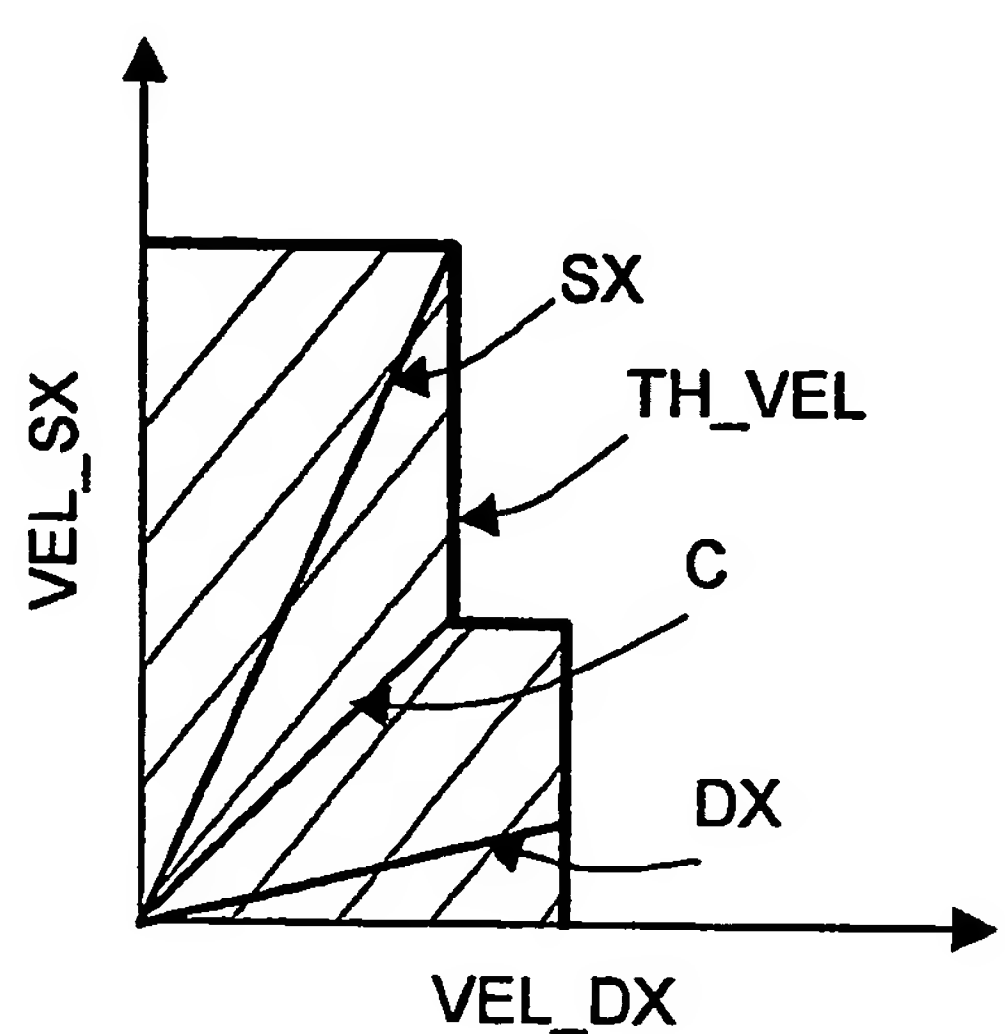

Fig.7

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT 03/00827

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B60R21/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B60R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 100 45 698 A (HONDA MOTOR CO LTD) 17 May 2001 (2001-05-17)	1-6, 14-17
Y	column 1, line 41 - column 4, line 21	7-12
A	column 11, line 12 - column 12, line 9 column 16, line 36 - column 17, line 27; figures	13
X	WO 02/098715 A (AUTOLIV DEV ; HALAND YNGVE (SE); FREDRIKSSON RIKARD (SE)) 12 December 2002 (2002-12-12)	1,14-17
Y	page 5, paragraph 1 - page 9, paragraph 3	7-12
A	figures	2-6,13
X	EP 0 914 992 A (NISSAN MOTOR) 12 May 1999 (1999-05-12)	1
A	paragraph '0004! - paragraph '0019!; figures	2-17

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
26 April 2004	04/05/2004

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Daehnhardt, A

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/180596 A1 (FLIK GOTFRIED ET AL) 5 December 2002 (2002-12-05)	1,7
A	paragraph '0017! - paragraph '0022!; figures	2-6,8-17
X	US 2002/033755 A1 (NAGATOMI KAORU ET AL) 21 March 2002 (2002-03-21)	1,7
A	paragraph '0007! - paragraph '0014!; figures	2-6,8-17

International Application No
PCT/IT 03/00827

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 10045698 A	17-05-2001	JP 3340704 B2	05-11-2002
		JP 2001080545 A	27-03-2001
		JP 2001080454 A	27-03-2001
		DE 10045698 A1	17-05-2001
		US 6516278 B1	04-02-2003
WO 02098715 A	12-12-2002	GB 2376118 A	04-12-2002
		WO 02098715 A1	12-12-2002
EP 0914992 A	12-05-1999	JP 11142422 A	28-05-1999
		DE 69805589 D1	04-07-2002
		DE 69805589 T2	24-10-2002
		EP 0914992 A1	12-05-1999
		US 6332115 B1	18-12-2001
US 2002180596 A1	05-12-2002	DE 10030465 A1	03-01-2002
		WO 0198117 A1	27-12-2001
		EP 1296859 A1	02-04-2003
		JP 2003535769 T	02-12-2003
US 2002033755 A1	21-03-2002	JP 2002087204 A	27-03-2002
		DE 10145698 A1	23-05-2002